

2021

PRODUCT OVERVIEW

DISPLAYS
MINI-PLCs
I/O-MODULES
INTERFACE CONVERTERS
PROCESS CONTROLLERS
TRANSMITTERS
DATA LOGGERS



FRESH WIND FROM HANOVER

As a progressive company from Hanover, Germany, we develop and distribute innovative automation technology and industrial electronic products. This includes ready-to-install control panels, display modules, Mini-PLCs and other devices.


akYtec was founded in 2010 by experienced and highly qualified specialists from the fields of electronics development and automation technology. The company focuses on developing and distributing industrial automation technology, such as controllers with integrated touch screens. Integrating external technology and manufacturing partners allows akYtec to adapt flexibly to customer needs at any time. akYtec brings together key technologies and know-how to develop products.

We cooperate with many respectable and professional distributors and system integrators in different countries.



„We offer affordable but reliable products that can be flexibly adapted by taking advantage of the existing resources of our development partners to the requirements of our customers.“

Alex Holm, Managing director of akYtec GmbH

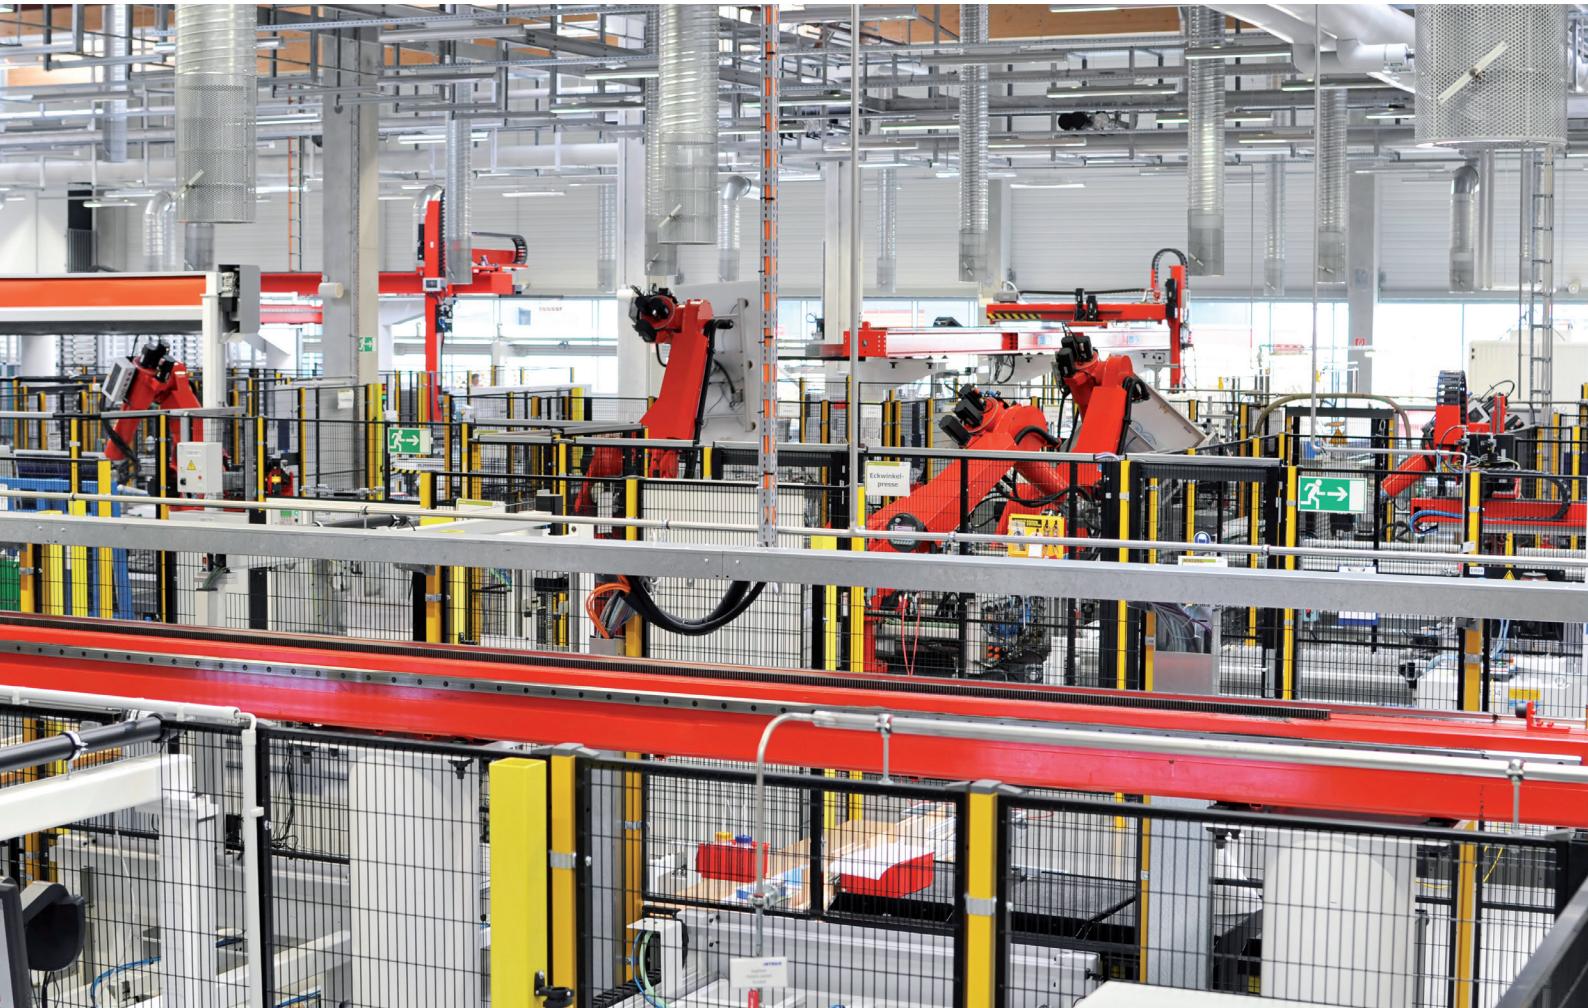

PROCESS DISPLAYS

Pages 04 – 15

MINI-PLCs

Pages 16 – 27

I/O-MODULES

Pages 28 – 38

INTERFACE CONVERTERS

Pages 39 – 44

PROCESS CONTROLLERS

Pages 45 – 59

TEMPERATURE TRANSMITTERS

Pages 60 – 63

PRESSURE TRANSMITTERS

Pages 64 – 69

HUMIDITY TRANSMITTERS

Pages 70 – 72

DATA LOGGERS

Pages 73 – 74

Process indicator 4-20 mA

The ITP11 is a universal, microprocessor controlled display unit for monitoring industrial processes. The measured values are scalable. The ITP11 is designed to be connected to any transmitter with a 4-20 mA output. It requires no auxiliary power and is supplied directly from the current loop. This device has a compact enclosure that fits into a standard Ø22.5 mm mounting cutout, which provides quick and easy installation of many displays of this kind to be accommodated on a control panel or at the control cabinet door.

Functions and features:

- Visualization of any 4-20mA signal received from a relevant output of a sensor, PLC, I/O module, etc.
- Signal scaling
- Adjustable decimal point position
- Display of up to four 14 mm high digits including the decimal point
- Square root function (for special transmitters)
- Damping of the measured signal
- Alarm function (blinking when exceeding the set points)
- Error indication when exceeding the measuring limits
- Access protection



Standard variants	Description	Enclosure
ITP11	ITP11 with red LED color	48 x 26 x 65 mm Panel mount
ITP11-G	ITP11 with green LED color	



Display color

RED
GREEN

Analog input 4-20 mA

4-20
mA

Loop-powered (4...20 mA)

4-20
mA

Easy mounting in Ø 22.5 mm borehole



Save time for installation



Compact size



Can be installed in a push-button box



Accuracy 0.2%

0.2

IP Code (on the front)

IP65

Ambient temperature



+80°C
-40°C

Areas of application:

The 4-20 mA process indicator ITP11 is particularly suitable for the fast and easy installation of visual display systems for various processes, such as water supply or thermal processing. The ITP11 can be used as an additional standalone display unit for on-site process visualization or as a part of a complex visual display system.

Technical data:

Power supply	from current loop
Input signal	4-20 mA (2-wire)
Inputs	1
Measuring range	3.8-22.5 mA
Guaranteed normal operation	3.2-25 mA
Voltage drop, max.	4 V
Accuracy	0.2 % + 1 digit
Display	4-digit, 7-segment LED display
Character height	14 mm
Display colour	red or green
Sampling rate (without damping)	1 reading/s
IP Code	front IP65, rear IP20
Dimensions	48 x 26 x 65 mm
Weight	approx. 30 g
Protection class	III
Ambient temperature	-40...+80 °C
Storage temperature	-25...+80 °C
Humidity	up to 80% (non-condensing)

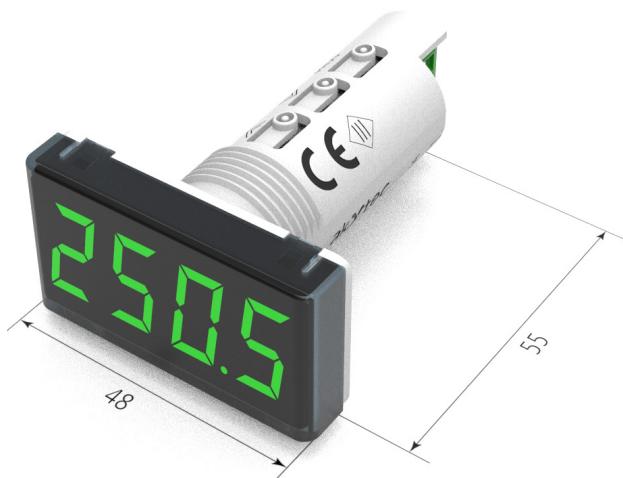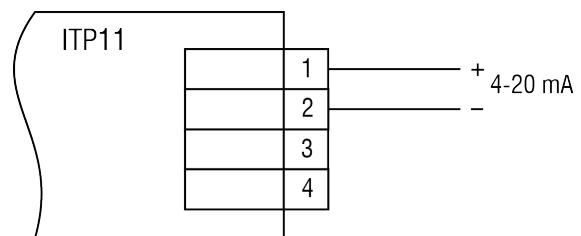Dimensions:**Electrical connection:**

Process Indicator 4-20mA (wall-mount)

The ITP11-W is a universal applicable display unit for monitoring of industrial processes. It connects to any 4-20mA output to visualise the present signal. This process display requires no auxiliary power and is supplied directly from the current loop. The ITP11-W is delivered in a dust-tight and water-resistant IP65-rated enclosure suitable for DIN-rail or wall mounting as well as a firm fixation on a tube (up to Ø200mm).

Functions and features:

- Visualization of any 4-20mA signal received from a relevant output of a sensor, PLC, I/O module, etc.
- Display of up to four 14 mm high digits including the decimal point
- Signal scaling
- Damping of the measured signal
- Square root calculation
- Alarm function (blinking when exceeding the set points)
- Access protection
- Wall, DIN rail or tube (Ø 20...200 mm) mounting
- Dust-tight and water-resistant IP65-rated enclosure



Standard variants	Description	Enclosure
ITP11-R-W	ITP11-W with red LED	70 x 50 x 28 mm DIN rail / Wall / Tube
ITP11-G-W	ITP11-W with green LED	

Display color

RED
GREEN

Analog input 4-20 mA

4-20 mA

DIN rail mounting

DIN

Wall mounting

WALL

Tube mounting (Ø20...200mm)

TUBE

Accuracy 0.2%

0.2

IP Code (on the front)

IP65

Ambient temperature


+80°C
-40°C

Technical data:


Supply current	from current loop
Voltage drop, max.	10 V
Input signal	4-20 mA
Measuring range	3.8...22.5 mA
Accuracy	0.2% + 1 digit
Sampling rate	1 reading / s
Ambient temperature	-40...+80 °C
Protection class	III
IP Code	IP65
Dimensions	70 x 50 x 28 mm
Weight	approx. 150 g
Mounting	DIN rail, wall, tube
Cable clamping range	Ø 3...6 mm

Wiring diagrams:

Two-side connection

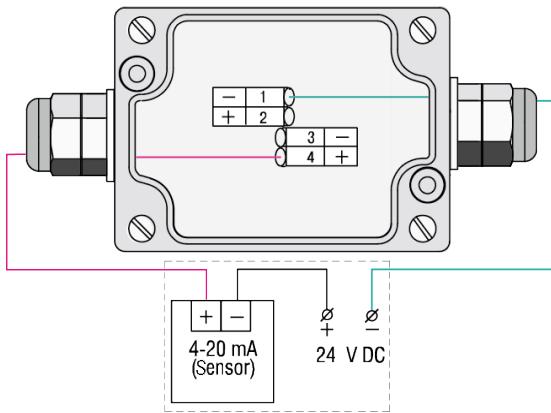

Connection from the right

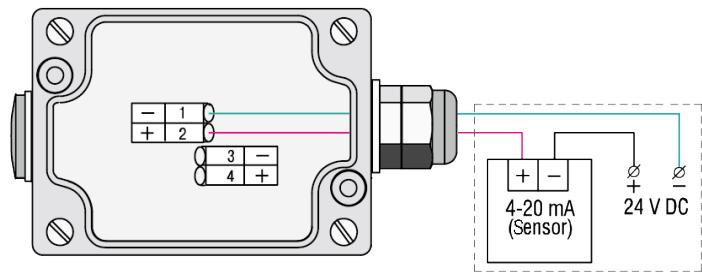**Mounting types:**

Universal Process Indicator 0-10 V / 4-20 mA

The ITP14 is a universally-applicable process display for monitoring and control of industrial processes. This display features a configurable current/voltage input and an NPN transistor output. The NPN transistor output makes it possible to implement on-off control of a low voltage relay up to 42 V DC / 200 mA.

This device has a compact enclosure that fits into a standard Ø22.5 mm mounting cutout, which provides quick and easy installation of many displays of this kind to be accommodated on a control panel or at the control cabinet door.

Functions and features:

- Analog input 0-5 mA, 0(4)-20 mA, 0(2)-10 V
- Display of up to four 14 mm high digits including the decimal point
- Signal scaling
- ON/OFF control with an NPN output
- Square root function (for special transmitters)
- Damping of the measured signal
- Alarm function (blinking when exceeding the set points)
- Error indication when the input signal is out of range
- Error indication when wire break or short circuit



Standard variants	Description	Enclosure
ITP14	ITP14 with red LED	48 x 26 x 65 mm Panel mount
ITP14-G	ITP14 with green LED	48 x 26 x 65 mm Panel mount



Display color

RED
GREEN

Configurable input for linear current or voltage singals

AI
mA,V

NPN transistor output to control a low voltage relay (up to 42V DC / 200mA)

DO
NPN

Power supply

24V
DC

Easy mounting in Ø 22.5 mm borehole



Compact size



Push-button box installation option



Accuracy 0.2%

0.2

IP Code (on the front)

IP65

Ambient temperature


+60°C
-40°C

Areas of application:

The universal display ITP14 is particularly suitable for the fast and easy installation of visual display systems for various processes, such as water supply, thermal processing, and many others. The ITP14 can be used as an additional stand-alone display unit for on-site process visualization or as a part of a complex visual display system.

Technical data:

Power supply	24 (10...30) V DC
Power consumption, max.	1 W
Input	1
Input signal	0-5 mA, 0(4)-20 mA, 0(2)-10 V
Sampling time	0.3 s
Accuracy	± (0,2% FS + 1 digit)
Temperature influence	≤ 0,2% / 10 °C
Input resistance	0-5 mA, 0(4)-20 mA ≤ 120 ohm / 0(2)-10 V ≥ 250 kohm
Output	1
Type	NPN transistor
Loading capacity	200 mA, 42 V DC
Display colour	red or green
IP Code	front IP65, rear IP20
Dimensions	48 x 26 x 65 mm
Weight	approx. 30 g
Protection class	III
Ambient temperature	-40...+60 °C
Storage temperature	-25...+55 °C
Humidity	up to 80% (non-condensing)

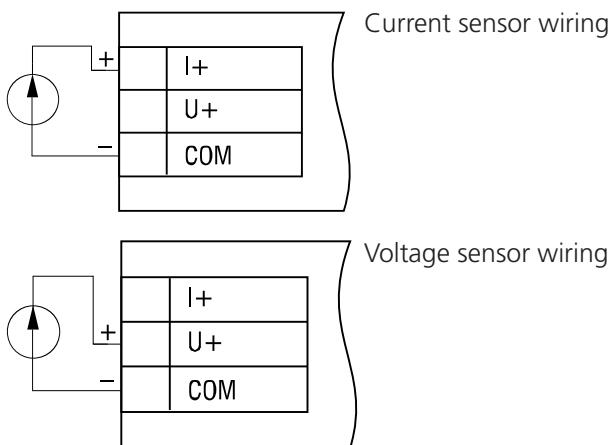Dimensions:**Electrical connection:**


LED Bar Graph Display

The ITP15 Bar Graph Display is a compact process indicator that is intended to visualize an analog input signal in the range from 0 to 100% with 10 bars 10% each. The input signal can be either a linear voltage signal of 0(2)-10 V or a current signal of 0(4)-20 mA. Due to cylindrical form of the mounting part of the enclosure, the device can be positioned either vertically or horizontally without changing the mounting cutout. The ITP15 fits into a standard cutout of Ø22.5 mm. The cutouts of the same diameter are commonly used for mounting standard signal lamps or push buttons at control cabinets or panels.

Along with indication, a simple on-off control can be implemented with the NPN transistor output of the ITP15. This output can control a load of up to 200 mA, 42 VDC.

Functions and features:

- Bar graph indication of the measured value
- Display range 0...100%
- 10 two-color bars (green/red) 10% each
- Configurable analog input (0-5 mA, 0(4)-20 mA, 0(2)-10 V)
- ON/OFF control with an NPN-transistor output
- 2 modes of blinking (fast/slow)
- Alarm settings

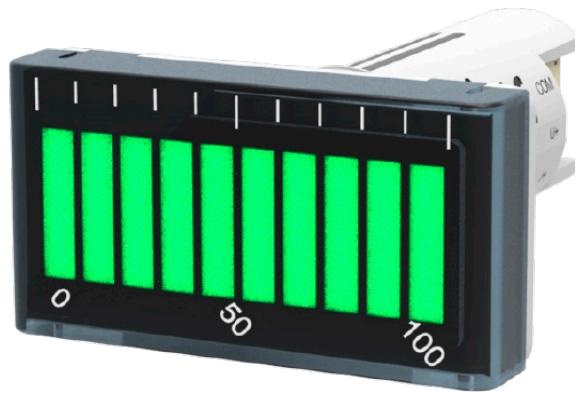

10 two-color bars

**RED
GREEN**

Configurable input for linear current or voltage signals

**AI
mA,V**

NPN-transistor output (42V DC, up to 200mA)

**DO
NPN**

Power supply

**24V
DC**

Alarm function

**ON
OFF**

Effortless installation in a Ø 22.5 mm mounting cutout

NO DRILLING

Compact size

COMPACT

Push-button box installation option

IN BOX

IP Code (on the front)

IP65





Ambient temperature

**+60°C
-40°C**

Technical data:

Power supply	24 (10...30) V DC
Power consumption, max.	1 W
Input	1
Input signal	0-5 mA, 0(4)-20 mA, 0(2)-10 V
Sampling time	0.3 s
Input resistance	0-5 mA, 0(4)-20 mA \leq 120 ohm / 0(2)-10 V \geq 250 kohm
Output	1
Type	NPN transistor
Loading capacity	200 mA, 42 V DC
Bargraph	10 two-color bars (LED)
Bars color	red/green
Resolution	10 %
IP Code	front IP65, rear IP20
Dimensions	48 x 26 x 65 mm
Weight	approx. 30 g
Protection class	III
Ambient temperature	-40...+60 °C
Storage temperature	-25...+55 °C
Humidity	up to 80% (non-condensing)

The bars can change their color if the process value crosses the set points.

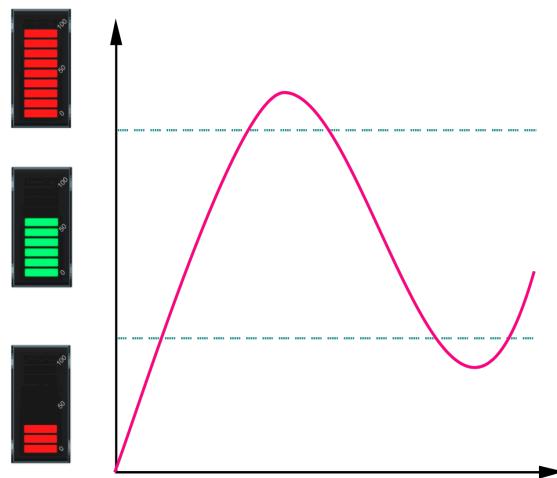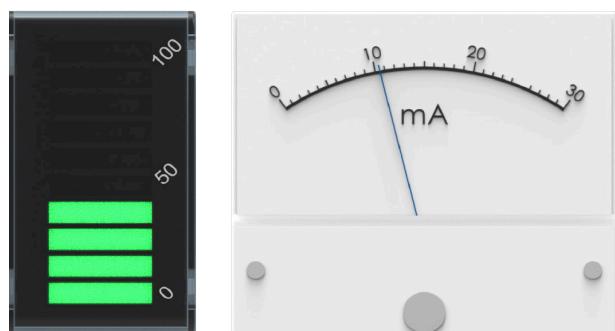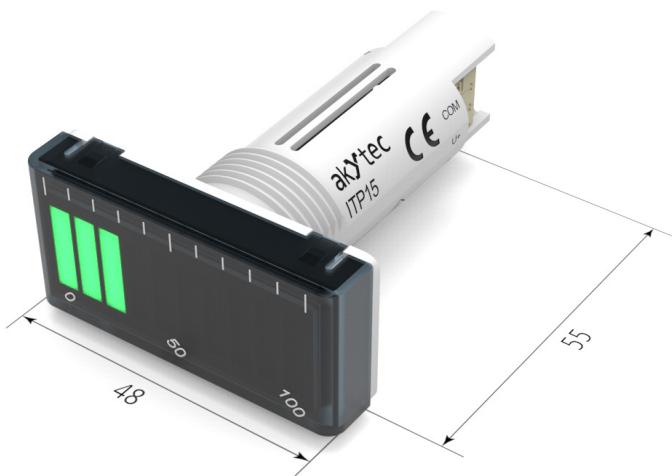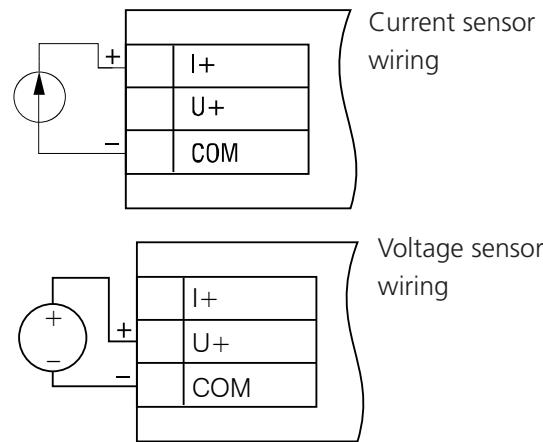**Dimensions:****Electrical connection:**

Temperature Indicator

The ITP16 is a temperature indicator for monitoring and control of industrial processes. This display features a configurable analog input for various RTD, TC or linear voltage signals and a digital output. The NPN transistor output makes it possible to implement on-off control of a low voltage relay (up to 42 V DC / 200 mA).

This device has a compact enclosure that fits into a standard Ø22.5 mm mounting cutout, which provides quick and easy installation of many displays of this kind to be accommodated on a control panel or at the control cabinet door.

Functions and features:

- Support for a wide range of RTDs and TCs
- Display of up to four 14 mm high digits including the decimal point
- Linear voltage signal scaling
- Adjustable decimal point position
- Square root function (for special transmitters)
- Damping of the measured signal
- Alarm function (amping of the measured signal)
- Error indication when the input signal is out of range
- Error indication when wire break or short circuit



Display color

RED
GREEN

Configurable input for a wide range of RTDs and TCs

AI
TC, RTD

NPN transistor output to control a low voltage relay (up to 42V DC / 200mA)

DO
NPN

Power supply

24V
DC

Easy mounting in Ø 22.5 mm borehole



Compact size



Push-button box installation option



Accuracy 0.2%

0.2

IP Code (on the front)

IP65

Ambient temperature

+60°C
-40°C


Standard variants	Description	Enclosure
ITP16	ITP16 with red LED	48 x 26 x 65 mm Panel mount
ITP16-G	ITP16 with green LED	48 x 26 x 65 mm Panel mount

Areas of application:

The universal display ITP16 is particularly suitable for the fast and easy installation of visual display systems for various thermal processes. The ITP16 can be used as an additional stand-alone display unit for on-site process visualization or as a part of a complex visual display system.

Technical data:

Power supply	24 (10...30) V DC
Power consumption, max.	1 W
Input	1
Input signal	TC, RTD, 0-1 V, -50...+50mV
Sampling time	2 s
Accuracy	$\pm 0.2\%$ FS
Temperature influence	$\leq 0.2\%$ / 10 °C
Output	1
Type	NPN transistor
Loading capacity	200 mA, 42 V DC
LED colour	red or green
IP Code	front IP65, rear IP20
Dimensions	48 x 26 x 65 mm
Weight	approx. 30 g
Protection class	III
Ambient temperature	-40...+60 °C
Storage temperature	-25...+55 °C
Humidity	up to 80% (non-condensing)

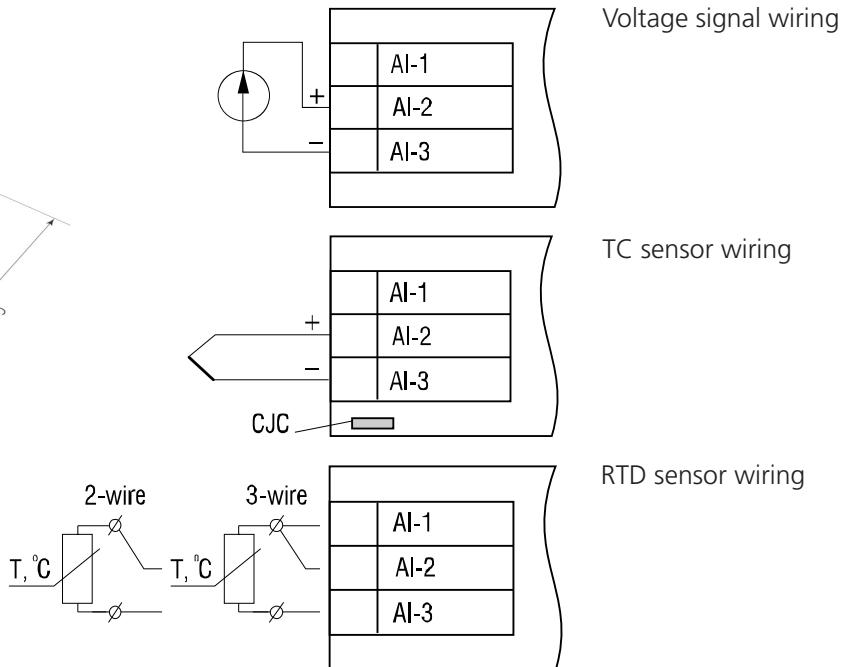Dimensions:**Electrical connection:**

RS485 Digital Display

The SMI2 is a universally applicable display unit for monitoring industrial processes. This digital display is intended to visualize any signal communicated to its RS485 interface within the Modbus network which this display is integrated into. This device has a compact enclosure that fits into a standard Ø22.5 mm mounting cutout, which provides quick and easy installation of many displays of this kind to be accommodated on a control panel or at the control cabinet door.

Functions and features:

- Visualization of any value transmitted on the RS485 network
- Display of up to four 14 mm high digits including the decimal point
- Support for Modbus RTU and Modbus ASCII
- Modbus Master or Modbus Slave in the network
- Support for several variable types (INT, WORD, FLOAT,...)



Standard variants	Description	Enclosure
SMI2	SMI2 with red LED	48 x 26 x 65 mm Panel mount
SMI2-G	SMI2 with green LED	48 x 26 x 65 mm Panel mount



Display color

RED
GREEN

Protocol Modbus RTU/ASCII

Modbus

RS485 interface

RS485

Master or Slave in the Modbus network

MASTER
SLAVE

Power supply

24V
DC

Easy mounting in Ø 22.5 mm borehole



Compact size



Push-button box installation option



IP Code (on the front)

IP65

Ambient temperature



+70°C
-40°C

Areas of application:

In any Modbus network, the RS485 Display SMI2 can be utilized as an additional stand-alone display unit for on-site process visualization or as a part of a complex visual display system. This digital display can be quickly and easily integrated into the existing network with the enclosed configuration software.

Technical data:

Power supply	12 / 24 (10.5...30) V DC
Power consumption, max.	1.5 W
Protocols	Modbus RTU / ASCII (Master / Slave)
Interface	RS485 (2-wire bus)
Baud rate	2.4...115.2 kbit/s
Display	4-digit, 7-segment LED display
Character height	14 mm
Display colour	red
IP Code	front IP65, rear IP20
Dimensions	48 x 26 x 65 mm
Weight	approx. 30 g
Protection class	III
Ambient temperature	-40...+70 °C
Storage temperature	-25...+70 °C
Humidity	up to 80% (non-condensing)
Galvanic isolation	yes

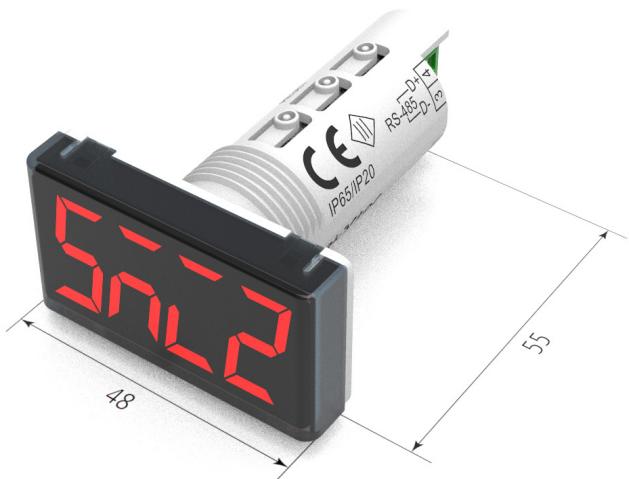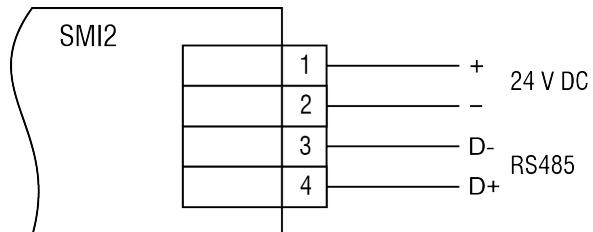Dimensions:**Electrical connection:**

Mini-PLC 20 I/O

PR100 is a compact Mini-PLC designed to solve basic automation tasks in, for example, lighting control, pumping control, ventilation and heating control, and other simple control systems.


With its minimum width, which measures as narrow as five standard MCBs placed inline, and dedicated enclosure form, the PR100 Mini-PLC allows for space-saving installation even in smaller consumer units, not to mention control cabinets. This device can operate in non-heated environments down to -40°C as well as in heated ones in temperatures up to +55°C. An application program is written in function block format in the akYtec ALP programming software available free of charge. The control algorithm is uploaded to the device memory through a micro USB cable.

Functions and features:

- 20 I/O points (8DI + 8DO + 4AI, see the Specifications table down the page for details)
- Support for analog signals of type 4-20 mA / 0-10 V
- RS485 interface and Modbus RTU/ASCII (Master/Slave)
- Extended operation temperature range: -40...+55 °C
- USB-powered in the programming mode
- Software-based features include: retain variables, day timer, week timer, PID control, etc.

Enclosure design features

- Thanks to its MCB-like form, the device enclosure fits perfectly fit into almost any consumer unit not to mention control cabinets
- Removable terminal blocks
- Convenient battery replacement

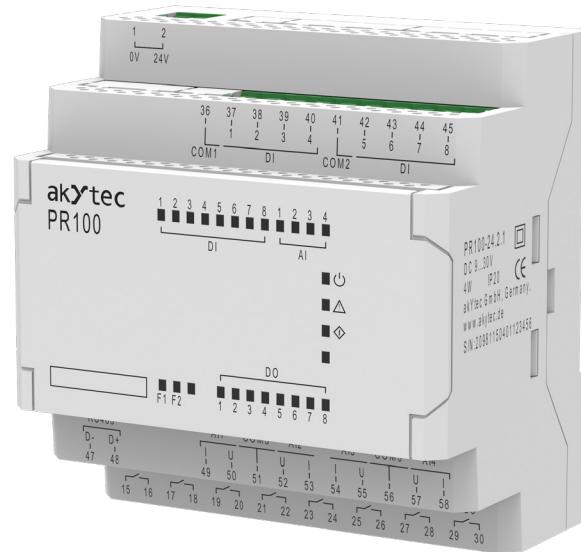

8 digital inputs

8DI

8 digital outputs

8DO

4 analog inputs

4AI

Protocol Modbus RTU/ASCII

Modbus

RS485 interface

RS485

USB interface



Built-in real-time clock




DIN rail mounting



Software at no charge



Ambient temperature

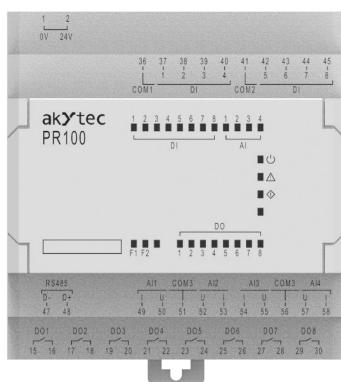

Technical Data:

General	
Power supply	24 (9...30) V DC
Power consumption, max.	4 W
Real Time Clock	Backup 5 years (CR2032)
Real Time Clock accuracy	± 3 s/day
Extension modules	none
Programming	
Programming environment	akYtec ALP
Programming language	FBD
Programming interface	Mini-USB
Memory	
ROM	128 kB
RAM	16 kB
Retain memory	1 kB
Network variables	128 Byte
Communication	
Interface	RS485
Protocols	Modbus RTU / ASCII (Master / Slave)
Baud rate	9.6...115.2 kBit/s
Digital inputs	
Quantity	8
Type	Switch contact
Logical states	
1	8.5...30 V DC (2...5 mA)
0	-3...+5 V DC (0...15 mA)
Galvanic isolation	in groups of 4
Universal inputs	
Quantity	4
Mode	Analog / Digital
Galvanic isolation	none
Analog input	4-20 mA, 0-10 V
ADC resolution	12 bit
Digital outputs	
Quantity	8
Type	relay, NO
Galvanic isolation	individual
Switching capacity	
AC	5 A, 250 V (resistive load)
DC	3 A, 30 V
Minimum load current	10 mA (at 5 V DC)
Environment	
Ambient temperature	-40...+55 °C
Storage temperature	-25...+55 °C
Humidity	up to 80 % (at +25 °C, non-condensing)
IP Code	IP20
Enclosure	
Dimensions	88 × 108 × 58 mm
Weight	approx. 250 g
Material	plastic

The PR100 Mini-PLC cannot be expanded with PRM extension modules.

Mini-PLC 40 I/O

PR102 is a Mini-PLC designed to implement basic control systems for various applications such as lighting control, pumping control, ventilation and heating control, and others.

The key advantages of PR102 are its extensive functionality and high density of I/O points.

Occupying only 126 mm of a DIN-rail length in a control cabinet, this Mini-PLC offers a total of 40 built-in digital and analog inputs and outputs, and two RS485 ports for communication with Modbus-RTU/ASCII-enabled devices. Furthermore, the built-in I/Os may be directly expanded with up to two extension modules of the PRM series.


An application program is written in function block format in the akYtec ALP programming software available free of charge. The control algorithm is uploaded to the device memory via a micro-USB-cable connection.

Functions and features:

- A total of 40 I/Os
- 8 analog inputs, each capable of connecting:
 - RTD sensors (Pt500/1000, Ni500/1000, etc.)
 - NTC/PTC sensors
 - 4-20 mA / 0-10 V signals
 - Digital signals
- 2 analog outputs configurable for 4-20 mA or 0-10 V
- 2 RS485 interfaces
- PRM-expandable: up to 32 additional I/O points over an internal bus with no loss in performance
- Software-based features include: retain variables, day timer, week timer, PID control, etc.

Enclosure design features

- Thanks to its MCB-like form, the device enclosure fits perfectly fit into almost any consumer unit not to mention control cabinets
- Removable terminal blocks
- Convenient battery replacement

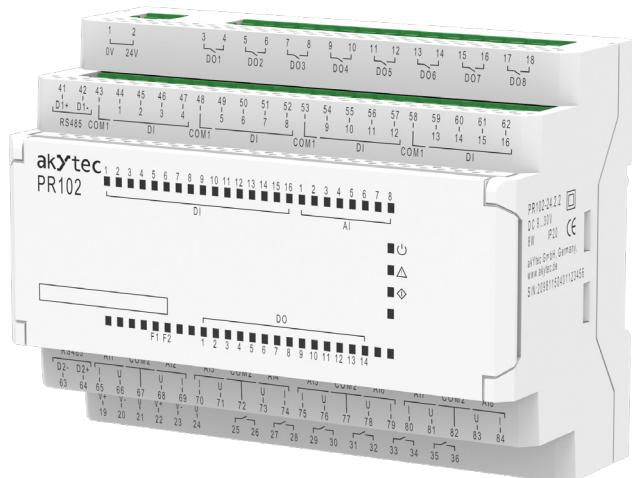

16 digital inputs

16DI

14 digital outputs

14DO

8 analog inputs

8AI

2 analog outputs

2AO

Modbus RTU/ASCII | RS485

Modbus RS485

USB interface

USB

Built-in real-time clock

Clock

DIN rail mounting

DIN

Software at no charge

Software

Ambient temperature

Temp

Technical Data:

General	
Power supply	24 (9...30) V DC
Power consumption, max.	8 W
Real Time Clock	Backup 5 years (CR2032)
Real Time Clock accuracy	± 3 s/day
Extension modules	up to 2 PRMs
Programming	
Programming environment	akYtec ALP
Programming language	FBD
Programming interface	Mini-USB
Memory	
ROM	128 kB
RAM	32 kB
Retain memory	1016 Byte
Communication	
Interface	2x RS485
Protocols	Modbus RTU / ASCII (Master / Slave)
Baud rate	9.6...115.2 kBit/s
Digital inputs	
Quantity	16
Type	Switch contact
Logical states	
1	8.5...30 V DC (2...5 mA)
0	-3...+5 V DC (0...15 mA)
Galvanic isolation	none
Universal inputs	
Quantity	8
Mode	Analog / Digital
Galvanic isolation	none
Analog input	4-20 mA, 0-10 V, 0-300 kOhm Pt1000, PTC, NTC...
ADC resolution	12 bit
Digital outputs	
Quantity	14
Type	relay, NO
Galvanic isolation	individual
Switching capacity	
AC	5 A, 250 V (resistive load)
DC	3 A, 30 V
Minimum load current	10 mA (at 5 V DC)
Analog outputs	
Quantity	2
Analog outputs	4-20 mA, 0-10 V
Permissible load	12...30 V
DAC resolution	12 bit
Galvanic isolation	individual
Environment	
Ambient temperature	-40...+55 °C
Storage temperature	-25...+55 °C
Humidity	up to 80 % (at +25 °C, non-condensing)
IP Code	IP20
Enclosure	
Dimensions	123 x 108 x 58 mm
Weight	approx. 250 g
Material	plastic

Mini-PLC

The PR200 Programmable Relay is a multifunctional and easy-to-use device designed in a plastic enclosure for DIN rail mounting as an alternative to the PLC. This mini PLC is available in several versions depending on the supply voltage (24V DC or 230V AC) and the set of built-in inputs and outputs (digital, analog, or their combination).


This device features a programmable 2-line 32-character LCD display. On option, one or two RS485 interfaces are available for implementing a Modbus communication either in Master or in Slave mode. A user-friendly programming software, akYtec ALP, is included free of charge.

Functions and features:

- Up to built-in 8DI + 8DO + 4AI + 2AO + LCD + 2xRS485 in one device
- Configurable inputs for 4-20mA, 0-10V, 0-4000ohm (PTC, KTY thermistors, Pt1000)
- Control of the outputs according to the input status and the logic of the user application
- Configuration with the function buttons or using ALP software
- Comprehensive programming of LCD display
- 2 programmable LEDs
- Master and / or Slave in a Modbus network
- Real-time clock
- Support for various extensions

Possible areas of application:

- Building automation
- Indoor and outdoor lighting, shop window lighting, access systems
- Technical equipment such as pumps, fans, compressors, presses
- Conveyor and filling systems

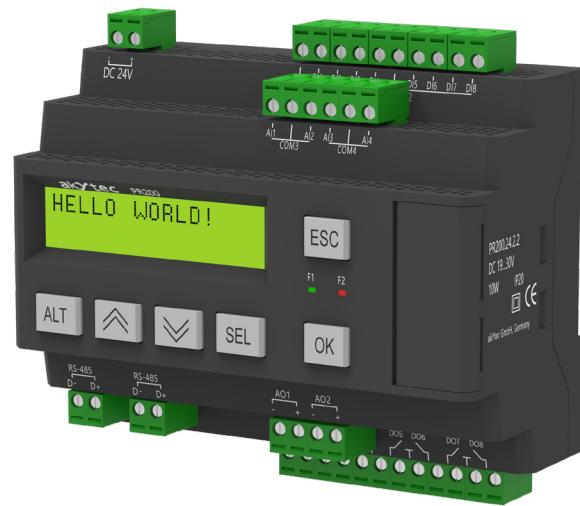

8 digital inputs

8DI

Up to 8 digital outputs

8DO

Up to 4 analog inputs

4AI

Up to 2 analog outputs

2AO

LCD display

LCD

Protocol Modbus RTU/ASCII

Modbus

Up to 2 RS485 interfaces

RS485

USB interface



DIN rail mounting

DIN

Ambient temperature



Ordering code:

PR200 -	X	X	X
	230		
		24	
I/O			
8 DI, 6 DO		1	
8 DI, 4 AI, 8 DO, 2 AO (4-20 mA)		2	
8 DI, 4 AI, 8 DO, 2 AO (0-10 V)		4	
Interface			
none		0	
RS485		1	
2x RS485		2	

Standard variant	Description	Enclosure
PR200.24.1.1	24 V DC, 8DI + 6DO, LCD, 1x RS485 (Modbus RTU/ASCII)	
PR200.24.2.0	24 V DC, 8DI + 8DO + 4AI + 2AO (4-20 mA), LCD	
PR200.24.2.2	24 V DC, 8DI + 8DO + 4AI + 2AO (4-20 mA), LCD, 2x RS485 (Modbus RTU/ASCII)	
PR200.24.4.0	24 V DC, 8DI + 8DO + 4AI + 2AO (0-10 V), LCD	
PR200.24.4.2	24 V DC, 8DI + 8DO + 4AI + 2AO (0-10 V), LCD, 2x RS485 (Modbus RTU/ASCII)	
PR200.230.1.1	230 V AC, 8DI + 6DO, LCD, 1x RS485 (Modbus RTU/ASCII)	123 x 108 x 58 mm, DIN rail
PR200.230.2.0	230 V AC, 8DI + 8DO + 4AI + 2AO (4-20 mA), LCD	
PR200.230.2.2	230 V AC, 8DI + 8DO + 4AI + 2AO (4-20 mA), LCD, 2x RS485 (Modbus RTU/ASCII)	
PR200.230.4.0	230 V AC, 8DI + 8DO + 4AI + 2AO (0-10 V), LCD	
PR200.230.4.2	230 V AC, 8DI + 8DO + 4AI + 2AO (0-10 V), LCD, 2x RS485 (Modbus RTU/ASCII)	

Technical data:

	PR200.230.1	PR200.230.2	PR200.24.1	PR200.24.2
General				
Power supply	230 (90...264) V AC; 50 (47...63) Hz		24 (19...30) V DC	
Power consumption, max.	10 VA	17 VA		10 W
Integrated voltage source	–	24±3 V DC, 100 mA		–
	LCD with backlight, 2-line, 2x16-characters		LCD with backlight, 2-line, 2x16-characters	
Function keys	6		6	
Real-Time Clock	Backup 8 years (CR2032)		Backup 8 years (CR2032)	
Mounting	DIN rail (switchboard / distribution box)		DIN rail (switchboard / distribution box)	
Ambient temperature	-20...+55 °C		-20...+55 °C	
IP code	IP20		IP20	
Dimensions	123 x 108 x 58 mm		123 x 108 x 58 mm	
Weight	approx. 350 g		approx. 350 g	
Programming				
Programming environment	akYtec ALP		akYtec ALP	
Programming language	FBD		FBD	
ROM	128 kB		128 kB	
Retain memory	1016 Byte		1016 Byte	
Interfaces				
RS485	optional, up to 2 x		optional, up to 2 x	
Protocols	Modbus RTU / ASCII (Master / Slave)		Modbus RTU / ASCII (Master / Slave)	
Baud rate	9.6...115.2 kbit/s		9.6...115.2 kbit/s	
Programming interface	Mini-USB		Mini-USB	
Digital inputs				
Quantity	8		8	
Type	Switch contact		Switch contact, PNP with open collector, digital signals -3...+30 VDC	
Logical states				
1	159...264 V AC (0.75...1.5 mA)		15...30 V DC (5 mA)	
0	0...40 V AC (0...0.5 mA)		-3...+5 V DC (0...1 mA)	
Galvanic isolation	in groups of 4		in groups of 4	
Universal inputs				
Quantity		4		4
Mode		Analog / Digital		Analog / Digital
Galvanic isolation		none		none
Analog input		0-10 V, 4-20 mA, 0...4 kOhm		0-10 V, 4-20 mA, 0...4 kOhm
ADC resolution		12 bit		12 bit
Digital outputs				
Quantity	6	8	6	8
Type	relay (NO)		relay (NO)	
Galvanic isolation	in groups of 2		in groups of 2	
Switching capacity				
AC	5 A, 250 V (resistive load)		5 A, 250 V (resistive load)	
DC	3 A, 30 V		3 A, 30 V	
Minimum load current	10 mA (at 5 V DC)		10 mA (at 5 V DC)	
Analog outputs				
Quantity		2		2
Type		4-20 mA		4-20 mA
Loading capacity		12...30 V, max. 1 kOhm		12...30 V, max. 1 kOhm
DAC resolution		10 bit		10 bit

Extension module

PRM provides the quickest and the most convenient, as regards installation and configuration, digital or analog I/O extension for the PR200 Programmable Relay from akYtec.

This module connects to the PR200 base unit directly over the internal bus, which ensures much faster and reliable communication as compared to RS485/Modbus. Moreover, the communication over the internal bus requires no additional I/O configuration as it is with Modbus registers.

Functions and features:

- Independent power supply (24V DC or 230V AC on option)
- The same high-speed performance as that of the PR200 base unit
- Easy connection, removal and replacement
- Galvanic isolation between power supply and I/O groups



Standard variants	Description	Enclosure
PRM-230.1	230 V AC voltage, 8 DI and 8 DO relay	DIN rail / wall 80 x 108 x 58 mm
PRM-24.1	24 V DC voltage, 8 DI and 8 DO relay	
PRM-230.3	230 V AC voltage, 4 AI and 2 AO	
PRM-24.3	24 V DC voltage, 4 AI and 2 AO	

8 digital or 4 analog inputs

8DI
4AI

8 digital or 2 analog outputs

8DO
2AO

Galvanic isolation



Cost effective




DIN rail mounting



IP code



Ambient temperature

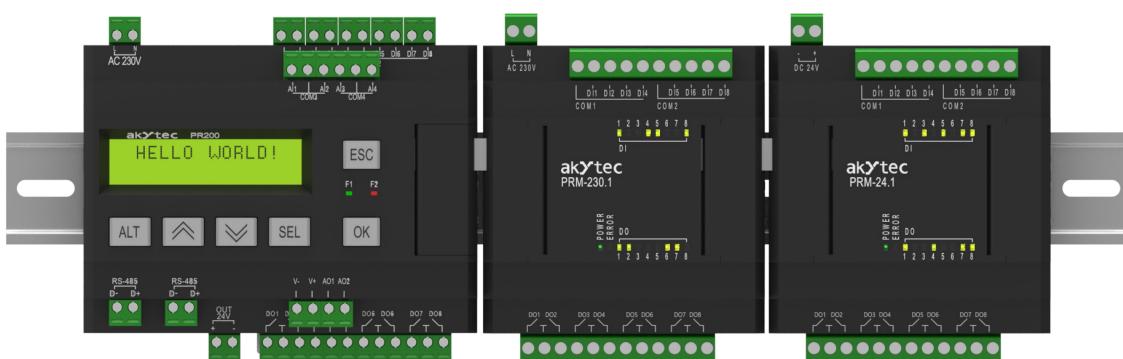

Technical data:

	PRM-230.1	PRM-24.1
General		
Power supply	230 (90...264) V AC; 50 (47...63) Hz	24 (19...30) V DC
Power consumption, max.	8 VA	4 W
Mounting	DIN rail (switchboard / distribution box)	
Ambient temperature	-20...+55 °C	
IP code	IP20	
Dimensions	80 x 108 x 58 mm	
Weight	approx. 250 g	
Digital inputs		
Quantity	8	
Type	Switch contact	Switch contact, PNP with open collector
Logical states		
1	159...264 V AC (0.75...1.5 mA)	15...30 V DC (5 mA)
0	0...40 V AC (0...0.5 mA)	-3...+5 V DC (0...1 mA)
Galvanic isolation	in groups of 4	
Digital outputs		
Quantity	8	
Type	relay (NO)	
Galvanic isolation	in groups of 2	
Switching capacity		
AC	5 A, 250 V (resistive load)	
DC	3 A, 30 V	
Minimum load current	10 mA (at 5 V DC)	

	PRM-230.3	PRM-24.3
General		
Power supply	230 (90...264) V AC; 50 (47...63) Hz	24 (19...30) V DC
Power consumption, max.	8 VA	4 W
Mounting	DIN rail (switchboard / distribution box)	
Ambient temperature	-20...+55 °C	
IP code	IP20	
Dimensions	80 x 108 x 58 mm	
Weight	approx. 250 g	
Analog inputs		
Quantity	4	
Type	TC, RTD, (0)4-20 mA, 0-1 V, -50-50 mV, 0 ... 3950 Ω	
ADC resolution	16 bit	
Sampling time for one input, max.	0.6-0.8 s	
Accuracy		
TC	0.5 %	
RTD	0.25 %	
I/U	0.25 %	
Analog input resistance, min.	10 kΩ	
Analog outputs		
Quantity	2	
Type	0-24 mA, 0-20 mA, 4-20 mA, 0-5 V, 0-10	
DAC resolution	12 bit	
Accuracy	± 0.5 %	
Temperature influence	± 0.25 %	
Galvanic isolation between outputs	2830 V	
Voltage supply (external, each output)	15-30 V DC	
Accuracy	± 0.5 %	
Output load (max.)	1000 Ω (0-24 mA, 0-20 mA, 4-20 mA) 300 Ω (0-5 V, 0-10 V)	

The PRM expansion modules are compatible with all akYtec programmable relays except the PR100.

Programmable Compact Controller

SMI200 Programmable Compact Controller is, in essence, an operator interface terminal featured with 128kB programming capacity and an RS485 interface to connect I/O modules. This device has a compact enclosure that fits into any standard Ø22.5 mm mounting cutout and provides effortless installation on a control panel or at a control cabinet door.

If you need the programming possibility of a PLC on the one hand, while that never-fulfilled potential of often overpriced PLCs makes no sense for your modest application on the other hand – the SMI200 Programmable Compact Controller is an ideal compromise for you in terms of both common sense and money.

Functions and features:

- Freely programmable device
- 2-line 32-character LCD display
- Master / Slave in a Modbus network over RS485
- Quick and easy installation in a Ø22.5 mm mounting cutout
- Programming software akYtec ALP (available at no charge)
- Real-time clock

Functions and features:

- Indoor and outdoor lighting systems
- HVAC applications
- Engine control
- Oven / furnace / kiln control
- Lifting systems
- Access control



LCD display

LCD

Protocol Modbus RTU/ASCII

Modbus

RS485 interface

RS485

USB interface



Real-Time Clock



Effortless installation



IP Code

IP54


Ambient temperature



Technical data:


General	
Power supply	24 (9...32) V DC
Power consumption, max.	2.5 W
Display	LCD with backlight, 2-line, 2x16-characters
Function keys	6
Real Time Clock	yes
Mounting	ø 22.5 mm borehole
Ambient temperature	-20...+55 °C
IP code	front IP54, rear IP20
Dimensions	100 x 60 x 60 mm
Weight	approx. 150 g
Programming	
Programming environment	akYtec ALP
Programming language	FBD
RAM	32 kB
ROM	128 kB
Network variable memory	512 Byte
Interfaces	
RS485	2-pole connector
Protocols	Modbus RTU / ASCII (Master / Slave)
Baud rate	9.6...115.2 kbit/s
Programming interface	Micro-USB

Dimensions

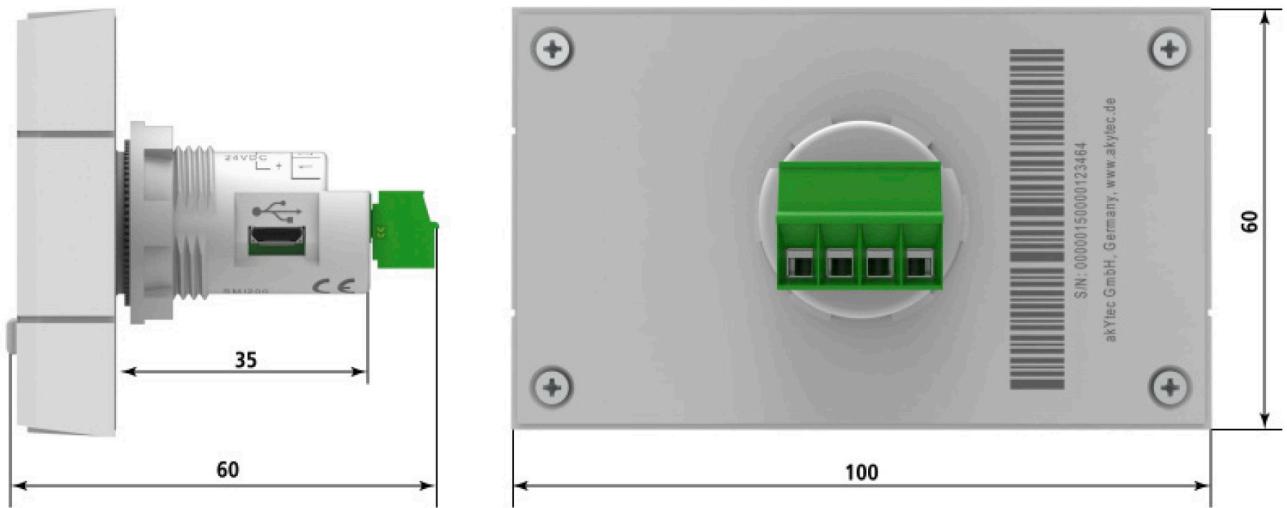

Programming software akYtec ALP

akYtec ALP software tool is a programming environment for akYtec's Mini-PLCs and the SMI200 Programmable Compact Controller. Projects for these devices are written in the programming language FBD (Function Block Diagram) according to IEC 61131-3. akYtec ALP is available free of charge and included in delivery.

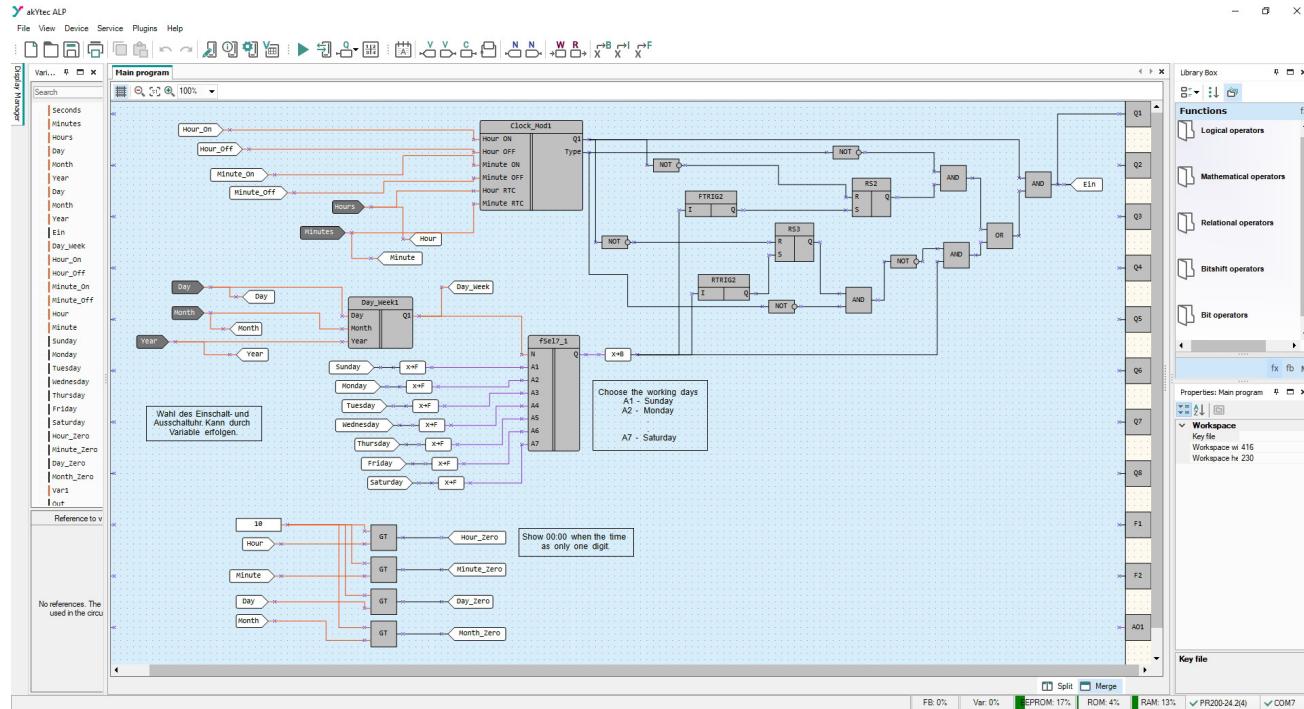

Properties:

- Creating your own function blocks / macros
- Simulation mode
- Real-time I/O status monitoring
- Use of internal variables for a simplified project creation
- Firmware update function
- Templates for network variables
- Complete overview of resource use and their availability in the project
- Integrated Display Manager
- Access to Online Macro Database

Free of charge software



Programming language FBD
(Function Block Diagram)



Overview of the functions, function blocks and macros:

Functions:

- Logical operators
- Mathematical operators
- Relational operators
- Bit operators

Function blocks:

- Triggers
- Timers
- Generators
- Counters
- PID controller

Macros:

- HVAC
- Analog conversions
- Signal converters (Pt1000, NTC, PTC)
- Control (On-Off, Range monitor)

Modbus RTU I/O Modules

The I/O-Modules of the MX110 Series offer a cost effective and flexible solution in distributed automation systems. Unlike many centralized I/O systems, the operation of these modules requires no need for involving any bus couplers nor supply modules because each MX110 unit has its own power supply and communication terminals on board. With the proven RS485 interface and intelligent functions, such as pulse counting or sensor state diagnostics, the MX110 modules can be used in different fields, e.g., building technology, process industry, etc. These robust digital and analog modules are used for decentralized data acquisition and process control as well as they can serve as a proper supplement to existing systems or new automation systems to be deployed.

The use of I/O-Modules provides:

- Significant reduction of cabling resulting in the lower susceptibility to interferences
- Reduced setup time due to direct connection of sensors and actuators
- Higher flexibility of the entire system due to free placement and easy replaceable elements
- Better system adaptability and extensibility

Applications:

- I/O signal transmission to a SCADA system or HMI (e.g. operator terminal)
- Increasing the number of I/O points of a PLC
- Any RS485-capable fieldbus network with communication via Modbus RTU/ASCII

Functions:

- PWM
- Pulse counter function
- Sensor-based status diagnostics
- Diagnostics of RS485 network status
- Additional logic functions at digital inputs and outputs
- Transmission protocol autodetection
- Generation of appropriate error signals or alarm signals
- DIN rail or wall mounting

Configuration

The configuration software is available free of charge. A simple and convenient interface enables fast and uncomplicated configuration of I/O-Modules. The configuration mask can be saved as a file.



Modbus protocol

Modbus

RS485 interface

RS485

Galvanic isolation



DIN rail mounting




Wall mounting





Ambient temperature




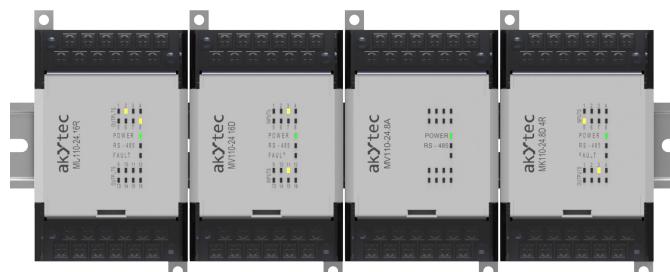


Overview table:

Module	Digital inputs	Digital outputs	Analog inputs	Analog outputs	Properties
Input modules					
MV110-24.8A			8		Inputs: RTD, TC, 0-5 mA, 0(4)-20 mA, 0-1 V, 25...900(2000) ohm, switch contacts
MV110-24.8AS			8		"Fast" inputs: 0(4)-20 mA, 0-5 mA, 0-10 V, measuring frequency up to 200 Hz
MV110-24.16D	16				Inputs: switch contacts (no external power supply required), NPN sensors, pulse counters (24 V DC external power supply, measuring frequency up to 1kHz)
MV110-24.16DN	16				Inputs: switch contacts, NPN sensors, pulse counters (24 V DC external power supply, measuring frequency up to 1kHz)
Combined I/O-Modules					
MK110-24.8D.4R	8	4			Inputs: Switching contacts, NPN sensors Outputs: relays 4 A, 24 V DC
Output modules					
MU110-24.8I				8	Outputs: 4-20 mA, accuracy 0.5 %
MU110-24.6U				6	Outputs: 0-10 V, accuracy 0.5 %
MU110-24.8R		8			Outputs: relays (NO), 4 A, 250 V AC or 24 V DC
MU110-24.8K		8			Outputs: NPN transistors, 400 mA, 60 V DC
MU110-24.16R		16			Outputs: relays (NO) 3 A at 250 V AC or 30 V DC
MU110-24.16K		16			Outputs: NPN transistors, 400 mA, 60 V DC

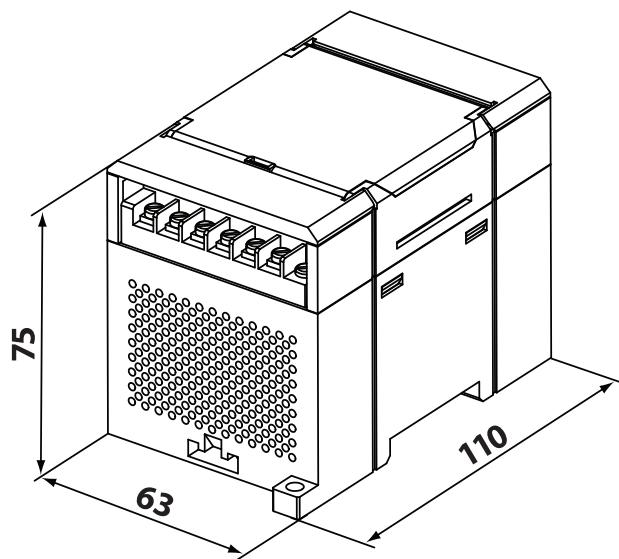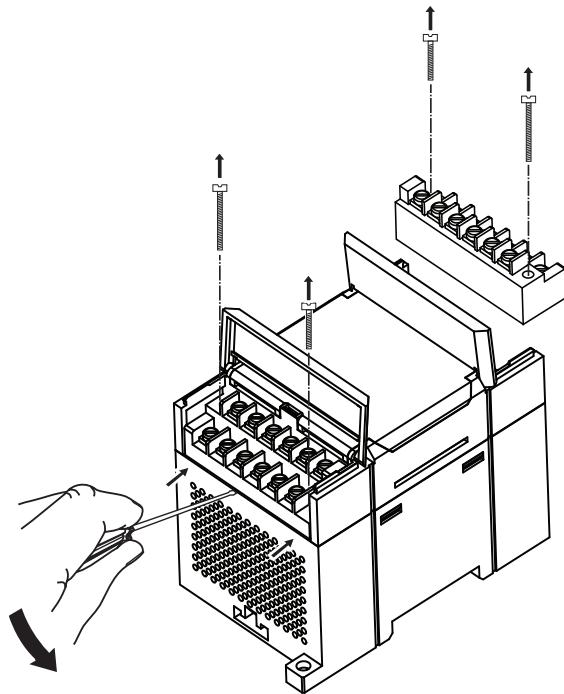Mx110 Dimensions**Plug-in screw terminals**

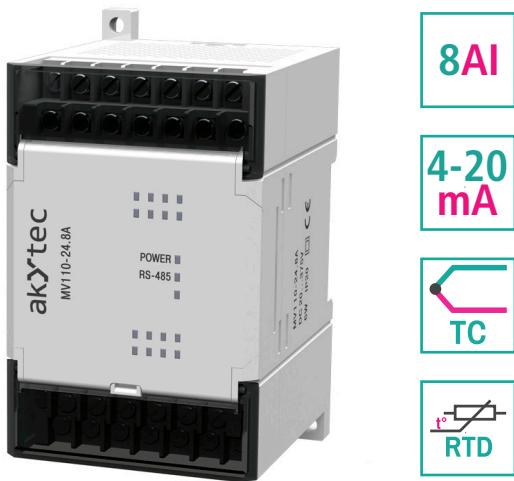**Analog input module
MV110-24.8A**


- 8AI**
- 4-20 mA**
- TC**
- RTD**

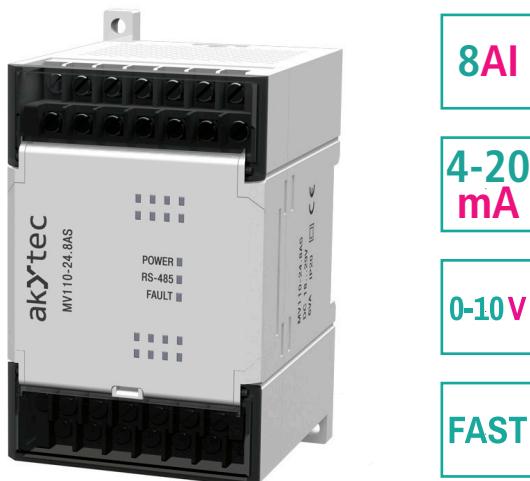**Analog input module
MV110-24.8AS**


- 8AI**
- 4-20 mA**
- 0-10 V**
- FAST**

Analog inputs	8
ADC resolution	16 bit
Input signals	
Resistance thermometer	Pt50, Pt100, Pt500, Pt1000 Ni100, Ni500, Ni1000
Thermocouple	A, J, N, K, S, R, B, T
Position encoder	25...900 ohm, 25...2000 ohm. 0(4)-20 mA, 0-5 mA
Standard signal	0-1 V, 0-5 mA, 0-20 mA, 4-20 mA
Usable as digital input	yes, 8x
Accuracy, max.	
Resistance thermometer	±0.25%
Thermocouple	±0.5%
Position encoder	±0.25%
Standard signal	±0.25%
Sampling rate per input, max.	
Resistance thermometer	0.9 s
Thermocouple	0.6 s
Position encoder	0.6 s
Standard signal	0.6 s

Analog inputs	8
ADC resolution	10 bit
Input signals	
Standard signal	0-10 V, 0-5 mA, 0-20 mA, 4-20 mA
Usable as digital input	no
Accuracy, msx.	±0.25 %
Input resistance	
0-10 V	min. 200 ohm
0-5 mA	130...500 ohm
0-20 mA	130...250 ohm
4-20 mA	130...250 ohm
Sampling rate per input, max.	5 ms ± 2 %

Supply	
Power supply	24 (21...35) V DC
Power consumption, max.	6 W
Communication	
Interface	RS485
Protocol	Modbus RTU / ASCII
Baud rate	2.4...115.2 kbit/s
IP Code	IP20
Environment	
Ambient temperature	-20...+55 °C
Storage temperature	-25...+55 °C
Humidity	up to 80%, non-condensing
Enclosure	
Dimensions	63 x 110 x 75 mm
Weight	approx. 240 g
Material	Plastic

Digital input module
MV110-24.16D(DN)



Digital I/O module
MK110-24.8D.4R



Digital inputs	16
MV110-24.16D	
Input signal	switch contact, NPN
Galvanic isolation	–
Pulse frequency, max.	1 kHz
Pulse length, min.	0.5 ms
Current, max.	7 mA
Lead resistance, max.	100 ohm
MV110-24.16DN	
Input signal	switch contact, NPN/PNP
Galvanic isolation	1500 V, in groups of 4
Pulse frequency, max.	1 kHz
Pulse length, min.	0.5 ms
Integrated voltage source	24±3 V
Current, max.	8.5 mA (with 27 V)
Logical „1“, min.	4.5 mA
Logical „0“, max.	1.5 mA

Digital inputs	8
Input signal	switch contact, NPN
Galvanic isolation	–
Insulation strength	1500 V
Pulse frequency, max.	1 kHz
Pulse width, min.	0.5 ms
Current, max.	7 mA
Lead resistance, max.	100 ohm
Digital outputs	4
Type	relays
Permissible load	4 A, 24 V DC

Supply	
Power supply	24 (21...35) V DC
Power consumption, max.	6 W
Communication	
Interface	RS485
Protocol	Modbus RTU / ASCII
Baud rate	2.4...115.2 kbit/s
IP Code	IP20
Environment	
Ambient temperature	-20...+55 °C
Storage temperature	-25...+55 °C
Humidity	up to 80%, non-condensing
Enclosure	
Dimensions	63 x 110 x 75 mm
Weight	approx. 240 g
Material	Plastic

Analog output module
MU110-24.8I



8AO
4-20 mA

Analog output module
MU110-24.6U



6AO
0-10 V

Analog outputs	8
Output signal	4-20 mA
DAC resolution	10 bit
Power supply	10...36 V DC
Accuracy, max.	±0.5 %
Load resistance	0...1300 ohm

Analog outputs	6
Output signal	0-10 V
DAC resolution	10 bit
Power supply	12...36 V DC
Accuracy, max.	±0.5 %
Load resistance	min. 2000 ohm

Supply	
Power supply	24 (20...28) V DC
Power consumption, max.	6 W
Communication	
Interface	RS485
Protocol	Modbus RTU / ASCII
Baud rate	2.4...115.2 kbit/s
IP Code	IP20
Environment	
Ambient temperature	-20...+55 °C
Storage temperature	-25...+55 °C
Humidity	up to 80%, non-condensing
Enclosure	
Dimensions	63 x 110 x 75 mm
Weight	approx. 240 g
Material	Plastic

Digital output module**MU110-24.8R****MU110-24.8K****Digital output module****MU110-24.16R****MU110-24.16K****8DO****RELAY****8DO****16DO****RELAY****16DO****Digital outputs****MU110-24.8R**

8

Type	relay (NO)
Current, max.	4 A at 250 V AC or 24 V DC

MU110-24.8K

Type	NPN
Current, max.	400 mA at 60 V DC

Digital outputs**MU110-24.16R**

16

Type	relay (NO)
Current, max.	3 A at 250 V AC or 30 V DC

MU110-24.16K

Type	NPN
Current, max.	400 mA at 60 V DC
Galvanic isolation	in groups of 4

Supply

Power supply

Power consumption, max.

24 (21...35) V DC

6 W (8R, 8K), 12 W (16R, 16K)

Communication

Interface

RS485

Protocol

Modbus RTU / ASCII

Baud rate

2.4...115.2 kbit/s

IP Code

IP20

Environment

Ambient temperature

-20...+55 °C

Storage temperature

-25...+55 °C

Humidity

up to 80%, non-condensing

Enclosure

Dimensions

63 x 110 x 75 mm

Weight

approx. 240 g

Material

Plastic

Modbus TCP I/O Modules

The Ethernet I/O-Modules of the MX210 series are available in different variants depending on the combination of the number, type, and properties of their inputs and outputs. The MX210 series includes modules featuring high-frequency inputs of up to 100 kHz for high-speed counting.


Each module of this series has two built-in Ethernet ports. This allows interconnection of these devices according to the daisy chain connection, which stands out by simplicity and scalability. The two Ethernet ports are bypass-capable, meaning that the data transfer is not interrupted even if one of the modules fails.

Any MX210 extension module can simultaneously communicate with up to 4 TCP clients, which facilitates cabling and configuring of the control system.

Functions and features:

- Up to 32 DI / 16 DO | up to 8 AI / 8 AO
- A wide range of various digital and analog inputs and outputs
- Network status diagnostics
- Supported protocols: Modbus TCP, MQTT, SNMP, SNTP
- 2-port Ethernet Switch (LAN bypass)
- Daisy-Chain Wiring
- Alarm signals
- Real-time clock
- Data logging
- Group configuration of multiple modules
- Easy mounting and connection
- Free of charge configuration tool

Dimensions

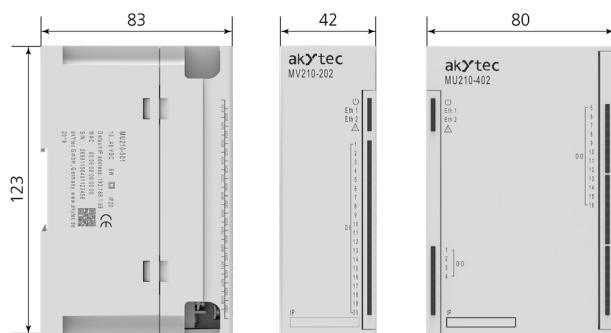

Modbus TCP



2 Ethernet ports



Daisy-Chain Wiring with LAN bypass



USB interface



Galvanic isolation



Data logging



DIN rail mounting



Wall mounting



Ambient temperature



Free software included




Overview table:

Module	Digital inputs	Digital outputs	Analog inputs	Analog outputs	Properties
Input modules					
MV210-101			8		Inputs: RTD, TC, 0-5 mA, 0(4)-20 mA, 0-1 V, 0...(2)5 kohm
MV210-202	20				Inputs: switch contacts, NPN/PNP sensors, pulse counters (24 V DC external power supply, measuring frequency up to 100 kHz)
MV210-204	20				Inputs: switch contacts (no external power supply required), NPN sensors, pulse counters (24 V DC external power supply, measuring frequency up to 400 Hz)
MV210-212	32				Inputs: switch contacts, NPN/PNP sensors, pulse counters (24 V DC external power supply, measuring frequency up to 100 kHz)
MV210-214	32				Inputs: switch contacts (no external power supply required), NPN sensors, pulse counters (24 V DC external power supply, measuring frequency up to 400 Hz)
MV210-221	15				6 inputs: switch contacts (no external power supply required), NPN sensors, pulse counters (24 V DC external power supply, measuring frequency up to 400 Hz). 9 inputs: AC 230V
Combined I/O-Modules					
MK210-311	6	8			Inputs: switch contacts (no external power supply required), NPN sensors; Outputs: relays (NO), 5 A at 250 VAC, cos > 0.4 or 3 A at 30 VDC
MK210-312	12	4			Inputs: switch contacts (24 V DC external power supply), NPN/PNP sensors; Outputs: relays (NO), 5 A at 250 VAC, cos > 0.4 or 3 A at 30 VDC
Output modules					
MU210-401		8			Outputs: relays (NO) 5 A at 250 VAC, cos > 0.4 or 3 A at 30 VDC
MU210-402		16			Outputs: relays (NO) 5 A at 250 VAC, cos > 0.4 or 3 A at 30 VDC
MU210-410		16			Outputs: transistors (PWM up to 60 kHz) High-side switch - 0.8A High- or low-side switch - 0.1A
MU210-501				8	Outputs: 0(4)...20 mA, 0...(1)10 V, accuracy 0.25 %

Technical data:

Supply	
Power supply	24 (10...48) V DC
Communication	
Interface	Ethernet 10/100 Mbps
Protocol	Modbus TCP, MQTT, SNMP, SNTP
Configuration	USB 2.0 (USB micro), Ethernet 10/100 Mbps
Environment	
Ambient temperature	-40...+55 °C
Storage temperature	-25...+55 °C
Humidity	up to 80%, non-condensing
IP Code	IP20
Appliance class	II

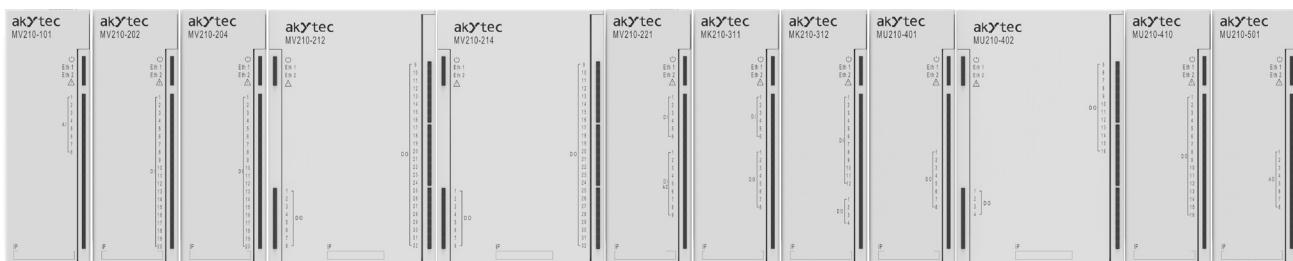

Analog input module
MV210-101


8AI

4-20
mA

TC

RTD

Digital input module
MV210-202


20DI

NPN

PNP

FAST

Analog inputs	8
ADC resolution	16 bit
Input signals	
Resistance thermometer	Pt50, Pt100, Pt500, Pt1000 Ni100, Ni500, Ni1000
Thermocouple	A, J, N, K, S, R, B, T
Position encoder	0-2(5) kohm
Standard signal	-1...1 V, -50...+50 mV, 0-5 mA, 0-20 mA, 4-20 mA

Digital inputs	20
Input signals	Switch contact, NPN/PNP
Power consumption, max.	5 W
Pulse frequency, max.	100 kHz
Pulse length, min.	5 µs (1-8 DI) 1 ms (9-20 DI)
Integrated voltage source	24±3 V
Logical „1”, min	5.5 mA (8.8...30.0 V)
Logical „0”, max	1.2 mA (0.0...6.1 V)

Digital input module
MV210-204


20DI

NPN

Digital input module
MV210-212


32DI

NPN

PNP

FAST

Digital inputs	20
Input signals	Switch contact, NPN
Power consumption, max.	5 W
Pulse frequency, max.	400 Hz
Pulse length, min.	1 ms
Integrated voltage source	no external power supply required 24±3 V (only for NPN inputs)
Lead resistance, max.	100 Ohm

Digital inputs	32
Input signals	Switch contact, NPN/PNP
Power consumption, max.	9 W
Pulse frequency, max.	100 kHz
Pulse length, min.	5 µs (1-8 DI) 1 ms (9-32 DI)
Integrated voltage source	24±3 V
Logical „1”, min	5.5 mA (8.8...30.0 V)
Logical „0”, max	1.2 mA (0.0...6.1 V)

Digital input module
MV210-214



32DI
NPN

Digital input module
MV210-221



15DI
NPN

Digital inputs	32
Input signals	Switch contact, NPN
Pulse frequency, max.	400 Hz
Pulse length, min.	1 ms
Integrated voltage source	no external power supply required 24±3 V (only for NPN inputs)
Lead resistance, max.	100 Ohm

Digital inputs	9+6
Input signals	230 V AC signals + dry contact NPN
Pulse frequency, max.	400 Hz
Pulse length, min.	1 ms
Integrated voltage source	no external power supply required 24±3 V (only for NPN inputs)
Lead resistance, max.	100 Ohm

Digital I/O module
MK210-311



6DI
8DO
NPN

Digital I/O module
MK210-312



12DI
NPN
PNP
4DO

Digital inputs	6
Input signal	Switch contact, NPN
Pulse length, min.	1 ms
Integrated voltage source	24±3 V (only for NPN inputs)
Lead resistance, max.	100 Ohm
Digital outputs	8
Type	Relay output (NO)
Permissible load	5 A, 250 V AC; 3 A, 30 V DC

Digital inputs	12
Input signal	Switch contact, NPN/PNP
Pulse frequency, max.	100 kHz
Pulse length, min.	5 µs (1-8 DI) 1 ms (9-12 DI)
Logical „1”, min	5.5 mA (8.8...30.0 V)
Logical „0”, max	1.2 mA (0.0...6.1 V)
Digital outputs	4
Type	Relay output (NO)
Permissible load	5 A, 250 V AC; 3 A, 30 V DC

**Digital output module
MU210-401**



8DO

RELAY

**Digital output module
MU210-402**



16DO

RELAY

Digital outputs	8
Output signal	Relay output (NO)
Power consumption, max.	6 W
Permissible load	5 A, 250 V A; 3 A, 30 V DC;
Pulse frequency, max.	1 Hz
Pulse length, min.	50 ms

Digital outputs	16
Output signal	Relay output (NO)
Power consumption, max.	9 W
Permissible load	5 A, 250 V A; 3 A, 30 V DC;
Pulse frequency, max.	1 Hz
Pulse length, min.	50 ms

**Digital output module
MU210-410**



16DO

Transistor

FAST

**Analog output module
MU210-501**



8AO

4-20 mA

0-10 V

Digital outputs	16
Output signal	Transistor output
Power consumption, max.	5 W
Permissible load	100 mA / 800 mA, 10...36 V DC
Pulse frequency, max.	60 kHz / 10kHz
Pulse length, min.	10 µs / 1 µs

Analog outputs	8
Type	0(4)-20 mA, 0-1(10) V
Accuracy	± 0.25 %
Power consumption, max.	5 W
DAC resolution	12 bits


RS232-RS485 Converter

IC3 is a bidirectional RS232-to-RS485 converter. With this device, you can connect any RS485 device directly to the serial RS232 COM port of your PC or another device. This converter supports automatic direction control of data transmission, so no software drivers are required. All standard protocols for the RS232 and RS485 interfaces are supported.

Functions and features:

- Bidirectional (RS232<->RS485) data exchange
- ADDC (Automatic Data Direction Control) - no flow control is required
- Galvanic isolation
- Supply voltage 24 V DC or 230 V AC
- Built-in termination resistors

Dimensions

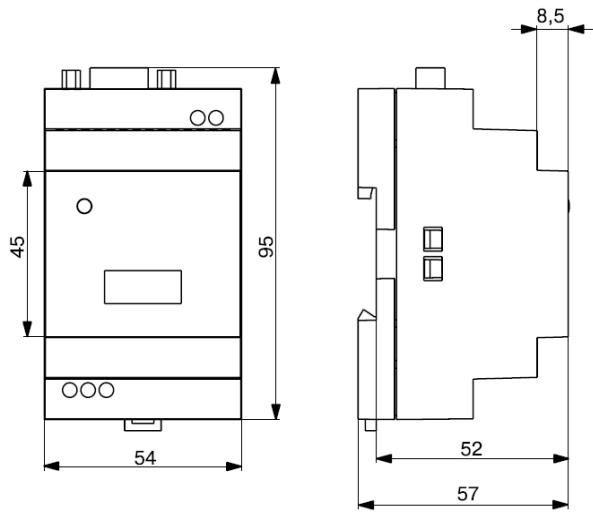

IC3 - X

Power supply

230 (85...245) V AC	230
24 (10...30) V DC	24



Conversion of RS485 and RS232 signals




RS485 interface



RS232 interface



Galvanic isolation



DIN rail mounting




IP20



Technical data:

Power supply	
IC3-230	230 (85...245) V AC, 50 (47...60) Hz
IC3-24	24 (10...30) V DC
Power consumption, max.	0.5 VA
Galvanic isolation	1500 V
RS232 Interface	
Cable length, max.	3 m
Baud rate	up to 115.2 kbit/s
Signals	TxD, RxD, GND
RS485 interface	
Cable length, max.	1200 m
Number of devices in the network, max.	32
Terminals	D+, D-
Dimensions	54 x 95 x 57 mm
Mounting	DIN rail (35 mm)
Weight	approx. 100 g

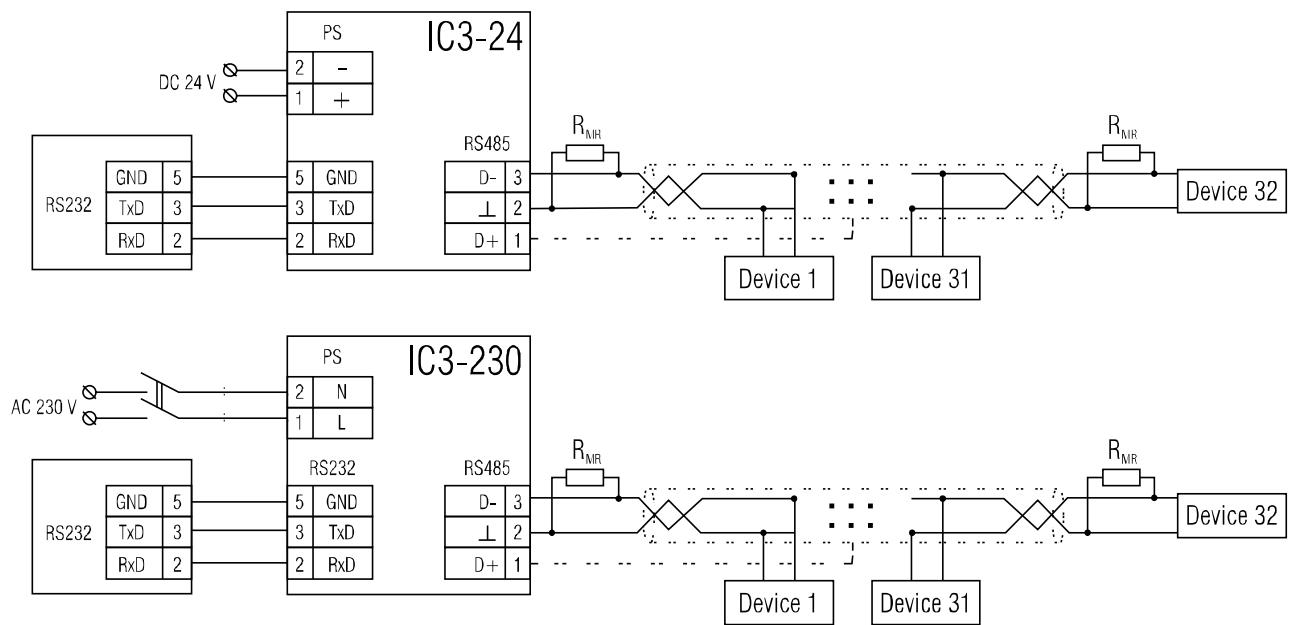Wiring:


USB-RS485 Converter

With the USB-RS485 bidirectional converter IC4, you can create an extra serial port on a notebook or PC and connect a serial device to a vacant USB port. It provides reliable galvanic isolation between the interfaces. The device is powered directly from the USB port.

Functions and features:

- Bidirectional (USB<->RS485) data exchange
- ADDC (Automatic Data Direction Control) - no flow control is required
- Galvanic isolation between interfaces
- Port-powered from PC's USB – no power supply unit is needed
- Power/Transmit LED indicator
- Operating systems:
 - Windows XP / Server 2003 / Vista / 7 / 8 / 8.1 / 10
 - Mac OS X
 - Linux 2.6. x/3.x.x |

Dimensions

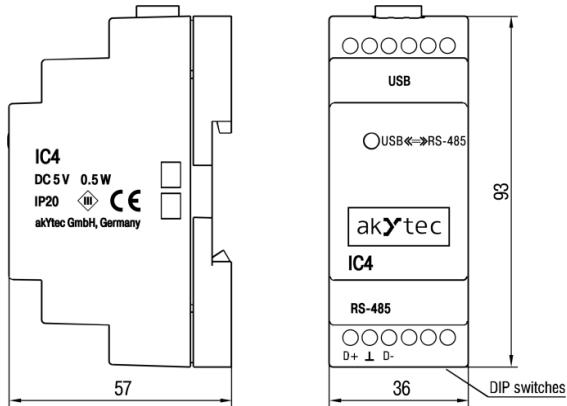


Bidirectional (USB<->RS485) data exchange




RS485 interface



USB interface



Galvanic isolation



DIN rail mounting




IP20



Technical data:

Power supply	over USB (5 V)
Power consumption, max.	0.5 W
Galvanic isolation	1500 V
USB interface	
Specification	USB 2.0
Terminals	D+, D-
Baud rate	up to 115.2 kbit/s
Cable length, max.	3 m
RS485 interface	
Specification	TIA/EIA-485
Terminals	D+, D-
Number of devices in the network, max.	32
Cable length, max.	1200 m
Dimensions	36 x 93 x 57 mm
Weight	approx. 65 g

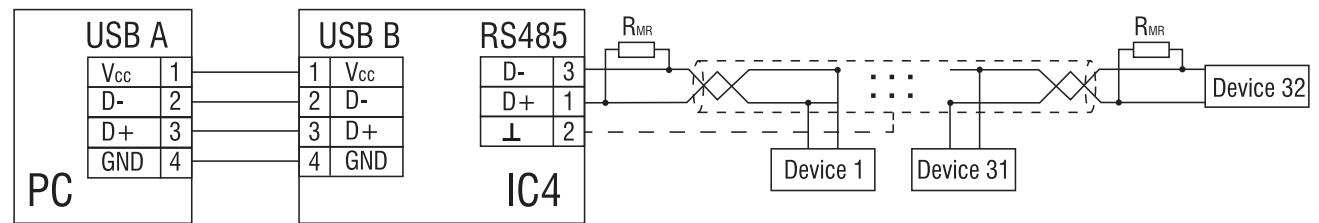Wiring:


RS485 Repeater

RS485 repeater IC5 is used to connect two segments of the RS485 network in purpose to increase the bus length and extend the network by additional devices (up to 32). The repeater provides galvanic isolation between network nodes.

Functions and features:

- Networking more than 1200 m
- Up to 32 nodes in the network
- Galvanic isolation between network nodes
- Universal (24 V DC / 230 V AC) power supply

Dimensions

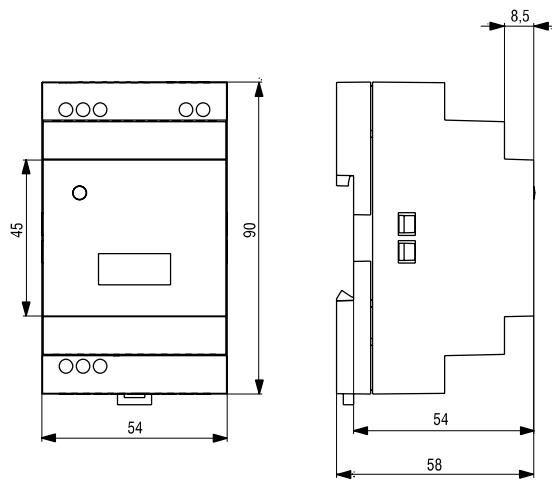


RS485 repeater



RS485 interface



Galvanic isolation



DIN rail mounting




IP20



Technical data:

Power supply	230 (85...245) V AC, 50 (47...60) Hz
Power consumption, max.	24 (10...30) V DC
Galvanic isolation	2 VA
RS485 interface	1500 V
Cable length, max.	1200 m
Number of devices in the network, max.	32
Terminals	D+, D
Dimensions	54 x 90 x 58 mm
Mounting	DIN rail (35 mm)
Weight	approx. 100 g

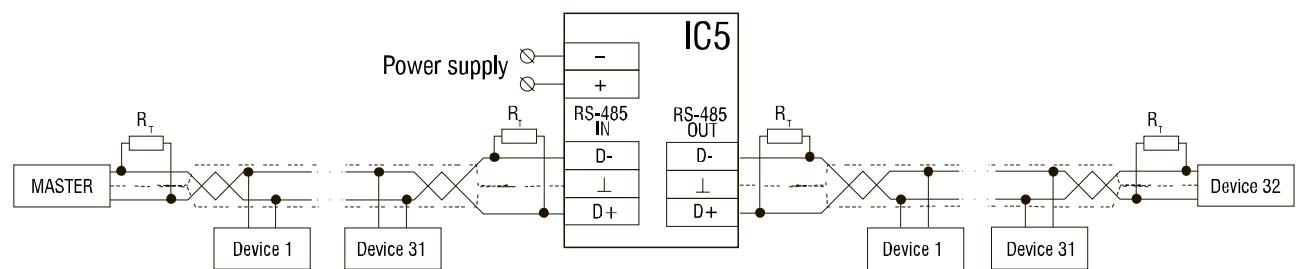
Wiring

8 Channel On-Off Controller

TRM138 is an 8-channel on-off controller designed in a plastic enclosure for panel mounting. This device is intended for measuring, displaying and controlling different physical variables such as temperature, pressure, humidity, etc.

Functions and features:

- Reception and transmission
- Displaying the measured values and configuration parameters on 4-digit LED displays
- Digital filtering of the input signal (EMI-interference protection)
- Signal correction
- Creating an alarm signal in case of sensor failure using the outputs for alarm signals and displaying the failure cause
- Creating control signals for actuating devices according to configuration parameters
- Manual control, creating control signals using the function keys
- Full control over PC using RS485 interface
- Operating with akYtec, Modbus RTU and Modbus ASCII protocols in a Slave mode
- Saving the set programmable parameters to non-volatile memory in case of power outage
- Configuration via PC or using the function keys.

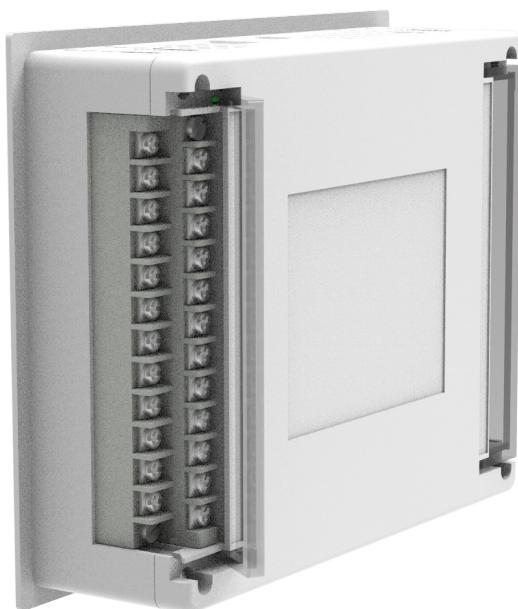

8 control loops

8 CHANNELS

8 universal analog inputs

8AI

Thermocouple
Resistance temperature detector
Analog input 4-20 mA
Analog input 0-1 V

OUTPUT
type

Output type on request

Relay output
Analog output 4-20 mA

ON
OFF

On-off control

Modbus
RS485

Modbus RTU/ASCII | RS485

+50°C
+1°C

Ambient temperature

Areas of application

The TRM138 is used in various fields of industry as e.g. multi-zone oven temperature control, protective and monitoring systems.


Technical data:

Power supply	230 (90...264) V AC; 50 (47...63) Hz
Power consumption, max.	18 VA
Inputs	8 analog (Resolution ADC 16 bit)
Optional outputs	8
Sampling rate (per input), max.	0.6 s
Integrated voltage source	24 ± 3 V DC , 150 mA
Interface	RS485
Protocols	Modbus RTU / ASCII, akYtec
Baud rate	2.4...115.2 kbit/s
IP Code	front IP54, enclosure IP20
Ambient temperature	+1...+55 °C
Dimensions	169 x 138 x 50 mm
Weight	approx. 450 g
Input signal	
RTD	Pt50, Pt100, 50P, 100P, 50M, 100M, Cu50, Cu100
TC	J, N, K, S, R, A, L
Standard signals	0-5 mA, 0-20 mA, 4-20 mA, -50...+50 mV, 0-1 V
Outputs	
R (Relay)	4 A, 250 V AC / 30 V DC
I (4-20 mA)	10...30 V, max. 1.3 kohm (DAC Resolution 10 bit)

Ordering code


Standard variants	Description	Enclosure
TRM138.H7.R	8DO (Relay)	144 x 169 x50.5 mm panel mounting
TRM138.H7.I	8AO (4-20 mA)	
TRM138.H7.IIIIRR	4AO (4-20 mA)+4DO (Relay)	

Typical application cases

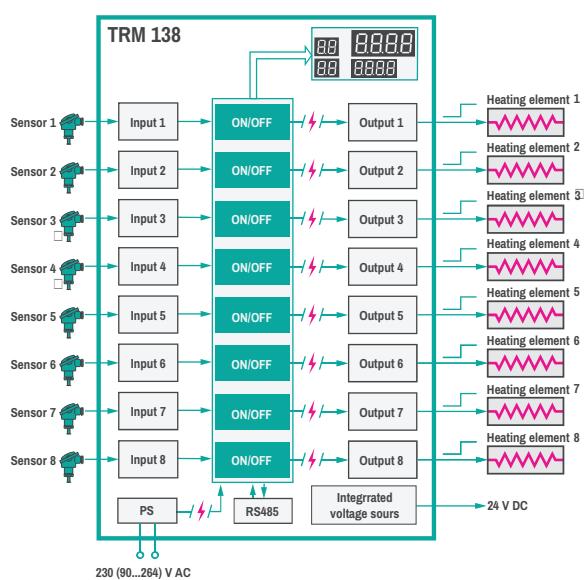


8-channel 2-position control

8-channel temperature controller can be used for bread production, in multiband tunnel type furnaces, and other process equipment.

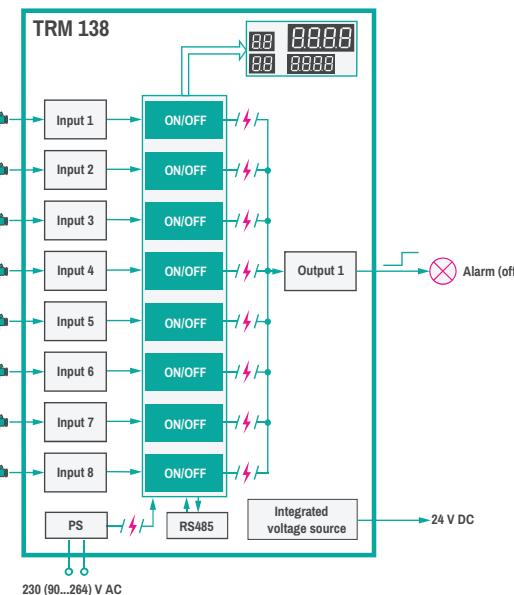


Alarm switch (8 inputs)

Alarm switch can be used in multi-zone ovens for food, metallurgical and other industries.

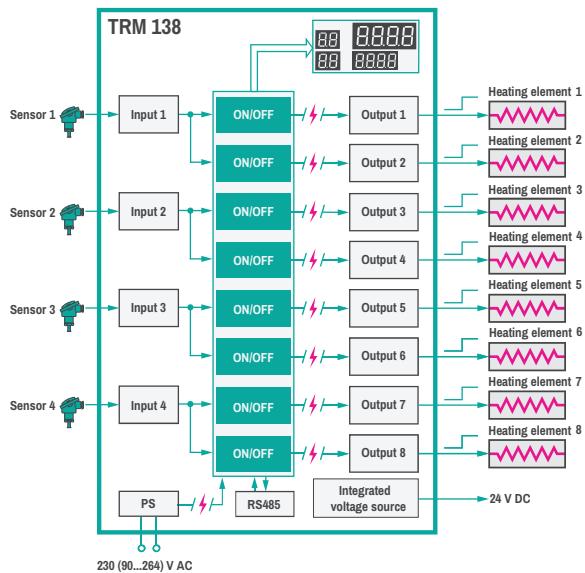

4-channel 3-position control

Temperature control and two-stage heating control in technological equipment with up to four heating areas and rapid heat-up: baking ovens, injection molding machines, extruders, etc.

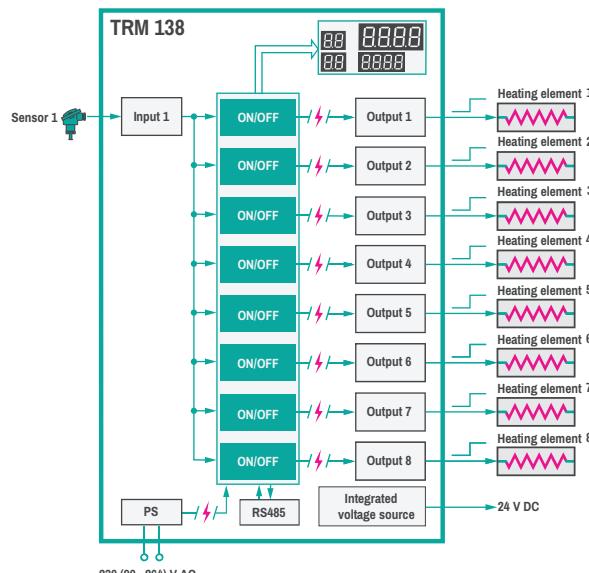

1-channel 2 position-control

Temperature on/off control with one sensor and eight independent settings.

2-channel Controller

TRM202 is a 2-channel process controller available in a panel- or wall-mount enclosure on option. This device is intended to measure, display, and control temperature, pressure, humidity, flow, or any other physical variables. Configurable analog inputs and optional outputs provide particular flexibility when choosing this controller to create automatic control and regulation systems of various technological processes in different areas of industry, agriculture, or utilities.

Functions and features:

- Reception and transmission of the input signal according to the sensor type
- Displaying the process values and configuration parameters on two 4-digit LED displays
- Scaling and filtering the input signal
- Signal correction, square root function
- Calculation of the difference between two signals
- On-Off control of two independent processes or three-step control of one process variable
- Modbus RTU/ASCII communication in slave mode over the RS485 interface
- Signal retransmission using analog output 4-20 mA
- Alarm output
- Sensor / input error detection
- Error indication
- Configuration via the functional keys

Types of enclosure

TRM202-H3.RR

for wall mounting



TRM202-H1.RR

for panel mounting



2 independent control loops

2 CHANNELS

2 universal analog inputs

2AI

Thermocouple

Resistance temperature detector

Analog input 4-20 mA

Analog input 0-1 V

OUTPUT
type

Output type on request

Relay output

Analog output 4-20 mA

ON
OFF

On-off control

Modbus
RS485

Modbus RTU/ASCII | RS485

+50°C
+1°C

Ambient temperature

Areas of application

The TRM202 process controller is especially recommended to be used for temperature measurement and control of mediums in refrigeration equipment, drying cabinets, various ovens, pasteurizers and in other process equipment.

Technical data:

Power supply	230 (90...264) V AC; 50 (47...63) Hz		
Power consumption,max.	6 VA		
Analog inputs	2 (ADC resolution 16 bit)		
Optional outputs	2		
Sampling rate, max.	1 s		
Interface	RS485		
Protocols	Modbus RTU / ASCII, akYtec		
Baud rate	2.4...115.2 kbit/s		
Ambient temperature	+1...+50 °C		
Enclosure			
Type	H1	H2	H3
Dimensions	96 x 96 x 70 mm	96 x 48 x 100 mm	105 x 130 x 65 mm
IP Code	front IP54	front IP54	IP44
Input signal			
RTD	Pt50, Pt100, 50P, 100P, 50M, 100M, Cu50, Cu100		
TC	B,J, N, K, S, R, A, T, L, A-2, A-3		
Standard signals	0-5 mA, 0-20 mA, 4-20 mA, -50...+50 mV, 0-1 V		
Outputs			
R (Relay)	8 A, 230 V AC / 30 V DC		
I (4-20 mA)	10...30 V, max. 1 kohm (DAC resolution 10 bit)		




Ordering code

TRM202.	X	.	X	
Enclosure				
96 x 96 x 70 mm, panel mount	H1			
96 x 48 x 100 mm, panel mount		H2		
105 x 130 x 65 mm, wall mount		H3		
Output type				
Relay output*			R	
Analog output 4-20 mA			I	

* For three-step control the device should be equipped with two digital outputs.

Standard variants	Description	Enclosure
TRM202-H1.RR	2DO (Relay)	96 x 96 x 70 mm, panel mount
TRM202-H2.RR		96 x 48 x 100 mm, panel mount
TRM202-H3.RR		105 x 130 x 65 mm, wall mount
TRM202-H1.RI	1DO (Relay)+1AO (4-20 mA)	96 x 96 x 70 mm, panel mount
TRM202-H2.RI		96 x 48 x 100 mm, panel mount
TRM202-H3.RI		105 x 130 x 65 mm, wall mount

Typical application cases

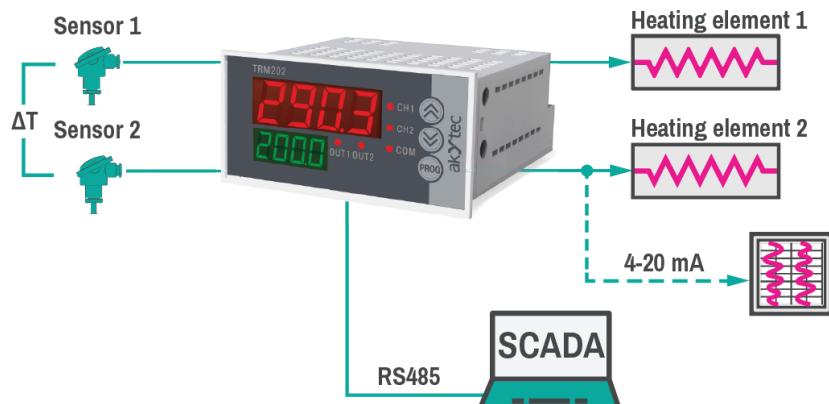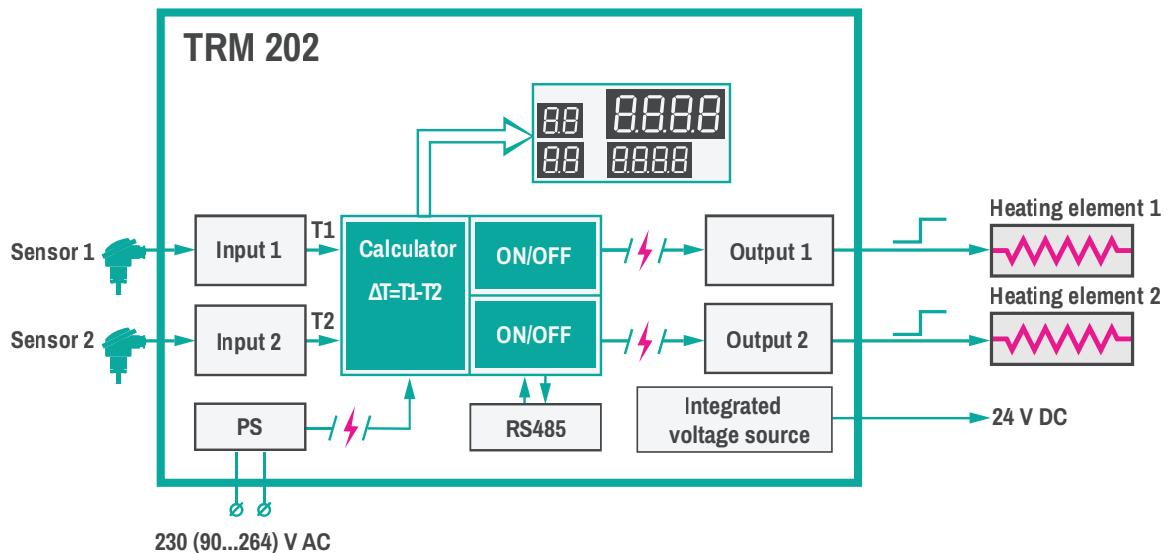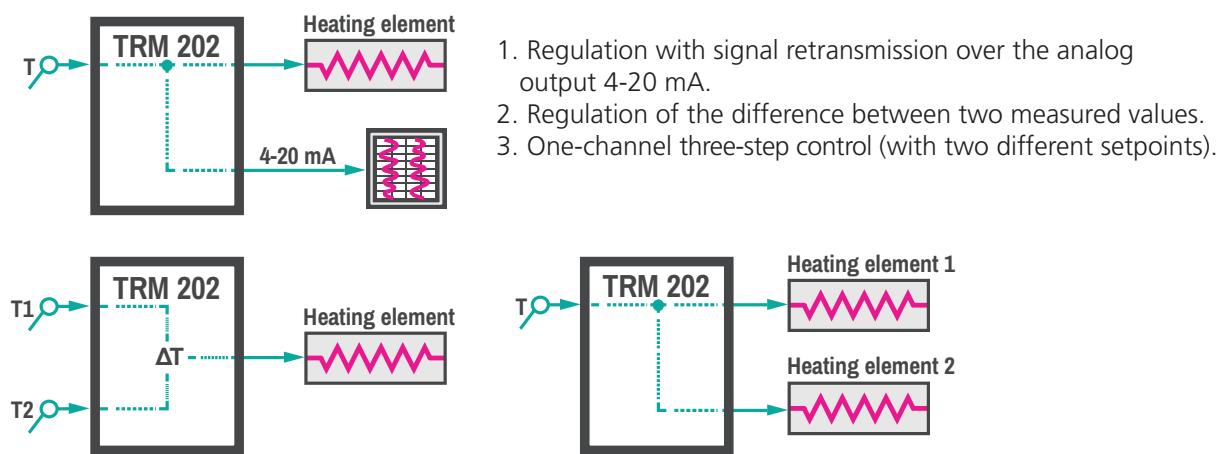

PID Controller

TRM210 is a PID controller available in different enclosure variants: a panel- or wall-mount enclosure on option. This device is intended to measure, display, and control temperature, pressure, humidity, flow, or any other physical variables. One configurable analog input and one optional output provide particular flexibility when choosing this controller to create automatic control and regulation systems of various technological processes in different areas of industry, agriculture, or utilities. A digital input is available to enable remote start stop of the control process.

Functions and features:

- Reception and transmission of the input signal according to the sensor type
- Displaying the process values and configuration parameters on two 4-digit LED displays
- Scaling and filtering the input signal
- Signal correction
- PID control (pulse or analog) or on-off control
- Autotuning function
- Stand-alone control
- Manual control
- Modbus RTU/ASCII communication in slave mode over the RS485 interface
- Signal retransmission using analog output 4-20 mA or 0-10 V
- Alarm output
- Sensor / input error and Loop Break Alarm detection
- Error indication
- Remote start / stop with the digital input
- Configuration via the functional keys

Types of enclosure

TRM210-H1.RR

for panel mounting



TRM210-H3.RR

for wall mounting



1 digital input

1DI

1 universal analog input

1AI

Thermocouple

Resistance temperature detector

Analog input 4-20 mA

Analog input 0-1 V

Output type on request

Output type

Relay output

Solid state relay

Analog output 4-20 mA

Analog output 0-10 V

PID control

PID control

On-off control

ON
OFF

Modbus RTU/ASCII | RS485

Modbus
RS485

Ambient temperature

+50°C
+1°C

Areas of application

The PID controller TRM210 is designed for creating automatic control and regulation systems of various technological processes in different areas of industry, agriculture and utilities.

Technical data:



Power supply	230 (90...264) V AC; 50 (47...63) Hz		
Power consumption,max.	6 VA		
Analog input	1 (ADC resolution 16 bit)		
Digital input	1		
Optional outputs	2		
Sampling rate, max.	1 s		
Interface	RS485		
Protocols	Modbus RTU / ASCII, akYtec		
Baud rate	2.4...115.2 kbit/s		
Ambient temperature	+1...+50 °C		
Enclosure			
Type	H1	H2	H3
Enclosure	96 x 96 x 70 mm	96 x 48 x 100 mm	105 x 130 x 65 mm
IP Code	front IP54	front IP54	IP44
Input signal			
RTD	Pt50, Pt100, 50P, 100P, 50M, 100M, Cu50, Cu100		
TC	B,J, N, K, S, R, A, T, L, A-2, A-3		
Standard signals	0-5 mA, 0-20 mA, 4-20 mA, -50...+50 mV, 0-1 V		
Outputs			
R (Relay)	1 A (PID control) / 8 A (alarm), 30 V DC / 230 V AC		
S (SSR)	100 mA, 4...6 V DC		
I (4-20 mA)	10...36 V, max. 1 kohm (DAC resolution 10 bit)		
U (0-10 V)	15...36 V, min. 2 kohm (DAC resolution 10 bit)		

Ordering code

TRM210.	X	.	X
Enclosure			
96 x 96 x 70 mm, panel mount	H1		
96 x 48 x 100 mm, panel mount		H2	
105 x 130 x 65 mm, wall mount		H3	
Output type			
Relay output	R		
Solid state relay	S		
Analog output 4-20 mA	I		
Analog output 0-10 V	U		

Standard variants	Description	Enclosure
TRM210-H1.RR	2DO (Relay)	96 x 96 x 70 mm, panel mount
TRM210-H2.RR		96 x 48 x 100 mm, panel mount
TRM210-H3.RR		105 x 130 x 65 mm, wall mount
TRM210-H1.SR		96 x 96 x 70 mm, panel mount
TRM210-H2.SR		96 x 48 x 100 mm, panel mount
TRM210-H3.SR		105 x 130 x 65 mm, wall mount
TRM210-H1.UR	1AO (0-10 V) + 1DO (Relay)	96 x 96 x 70 mm, panel mount
TRM210-H2.UR		96 x 48 x 100 mm, panel mount
TRM210-H3.UR		105 x 130 x 65 mm, wall mount
TRM210-H1.IR	AO (4-20mA)+1DO (Relay)	96 x 96 x 70 mm, panel mount
TRM210-H2.IR		96 x 48 x 100 mm, panel mount
TRM210-H3.IR		105 x 130 x 65 mm, wall mount

Typical application cases

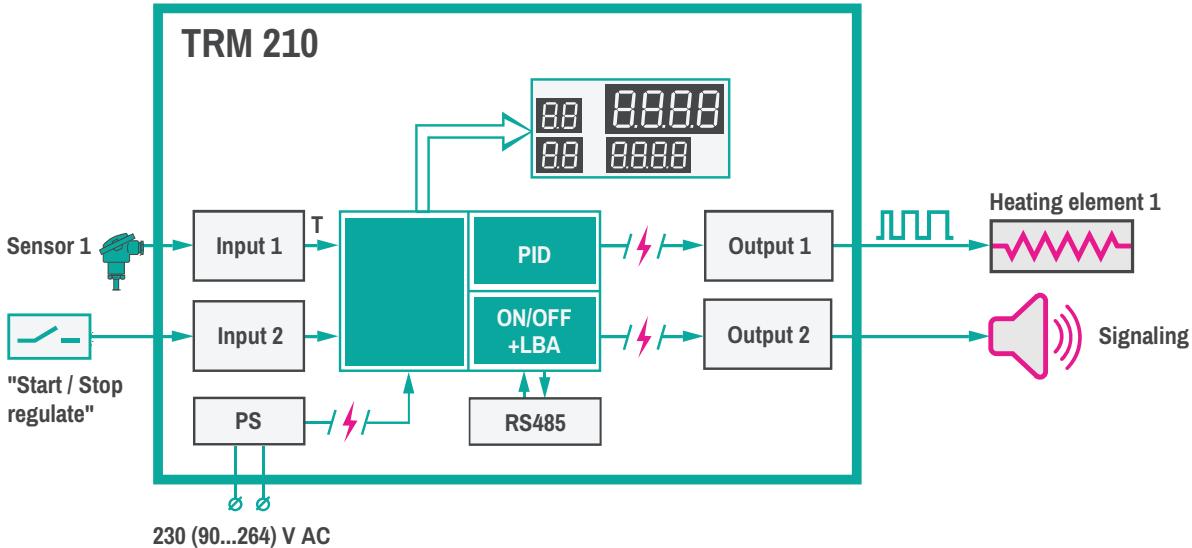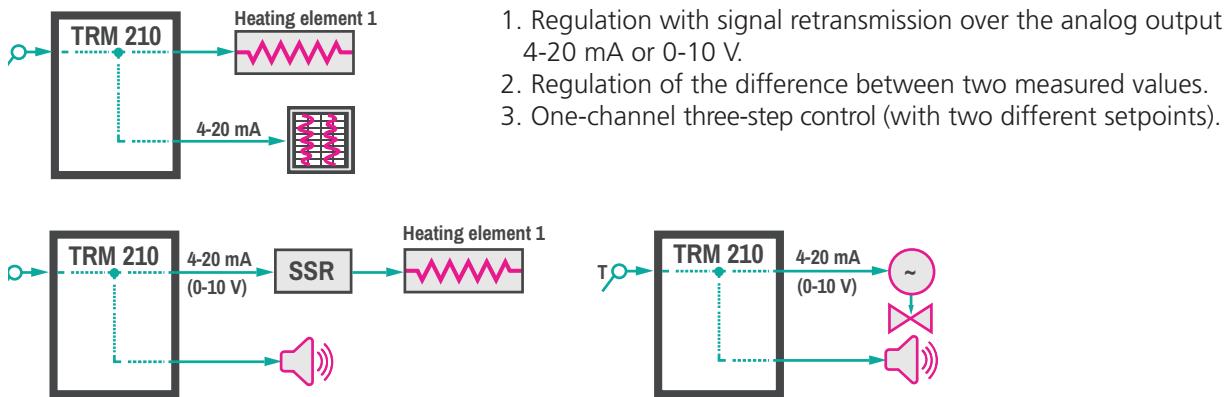

PID Controller

TRM 212 is a weather-compensated PID controller. This device has been specifically designed with dedicated internal logic to implement PID control of analog or 3-step control valves. The TRM212 requires 230 V AC power supply and can be operated as Slave in a Modbus network (RTU or ASCII) over the RS485 interface.

Functions and features:

- Reception and transmission of the input signal according to the sensor type
- Displaying process values and configuration parameters on two 4-digit LED displays
- Scaling and filtering the input signal
- Signal correction, square root function
- Calculation of the sum, difference, ratio, or root of the measured signal values
- PID control of analog or three-step control valves
- Remote setpoint adjustment in accordance with an external parameter
- Autotuning function
- Stand-alone control
- Manual control
- Modbus RTU/ASCII communication in slave mode over the RS485 interface
- Alarm output
- Sensor / input error and Loop Break Alarm detection
- Error indication
- Remote start / stop with the digital input
- Configuration via the functional keys

Types of enclosure

TRM212-H1.RR
for panel mounting



TRM212-H3.RR
for wall mounting



1 channel for controlling

1 CHANNEL

2 universal analog inputs

2AI

Thermocouple

Resistance temperature detector

Analog input 4-20 mA

Analog input 0-1 V

OUTPUT
type

Output type on request

Relay output

Analog output 4-20 mA

Analog output 0-10 V

PID
control

PID control

Modbus
RS485

Modbus RTU/ASCII | RS485

+50°C
+1°C

Ambient temperature

Areas of application

The process controller TRM212 is designed to measure and control temperature or other physical variables in different areas of industry, agriculture and utilities. It is especially recommended to use this device to control analog or three-step control valves.

Technical data:

Power supply	230 (90...264) V AC; 50 (47...63) Hz		
Power consumption,max.	6 VA		
Inputs	2 (ADC resolution 16 bit)		
Optional outputs	2		
Sampling rate, max.	1 s		
Interface	RS485		
Protocols	Modbus RTU / ASCII, akYtec		
Baud rate	2.4...115.2 kbit/s		
Ambient temperature	+1...+50 °C		
Enclosure			
Type	H1	H2	H3
Enclosure	96 x 96 x 70 mm	96 x 48 x 100 mm	105 x 130 x 65 mm
IP Code	front IP44	front IP54	IP44
Input signal			
RTD	Pt50, Pt100, 50P, 100P, 50M, 100M, Cu50, Cu100		
TC	B,J, N, K, S, R, A, T, L, A-2, A-3		
Standard signals	0-5 mA, 0-20 mA, 4-20 mA, -50...+50 mV, 0-1 V		
Outputs			
R (Relay)	1 A (PID control) / 8 A (alarm), 30 V DC / 230 V AC		
I (4-20 mA)	10...36 V, max. 1 kohm (DAC resolution 10 bit)		
U (0-10 V)	15...36 V, min. 2 kohm (DAC resolution 10 bit)		




Ordering code:

TRM212.	X	.	X
Enclosure			
96 x 96 x 70 mm, panel mount	H1		
96 x 48 x 100 mm, panel mount		H2	
105 x 130 x 65 mm, wall mount		H3	
Output type			
Relay output		R	
Analog output 4-20 mA*		I	
Analog output 0-10 V*		U	



* available only for Output 1

Standard variants	Description	Enclosure
TRM212-H1.RR	2DO (Relay)	96 x 96 x 70 mm, panel mount
TRM212-H2.RR		96 x 48 x 100 mm, panel mount
TRM212-H3.RR		105 x 130 x 65 mm, wall mount
TRM212-H1.IR	1AO (4-20 mA)+1DO (Relay)	96 x 96 x 70 mm, panel mount
TRM212-H2.IR		96 x 48 x 100 mm, panel mount
TRM212-H3.IR		105 x 130 x 65 mm, wall mount
TRM212-H1.UR	1AO (0-10 V)+1DO (Relay)	96 x 96 x 70 mm, panel mount
TRM212-H2.UR		96 x 48 x 100 mm, panel mount
TRM212-H3.UR		105 x 130 x 65 mm, wall mount



Typical application cases

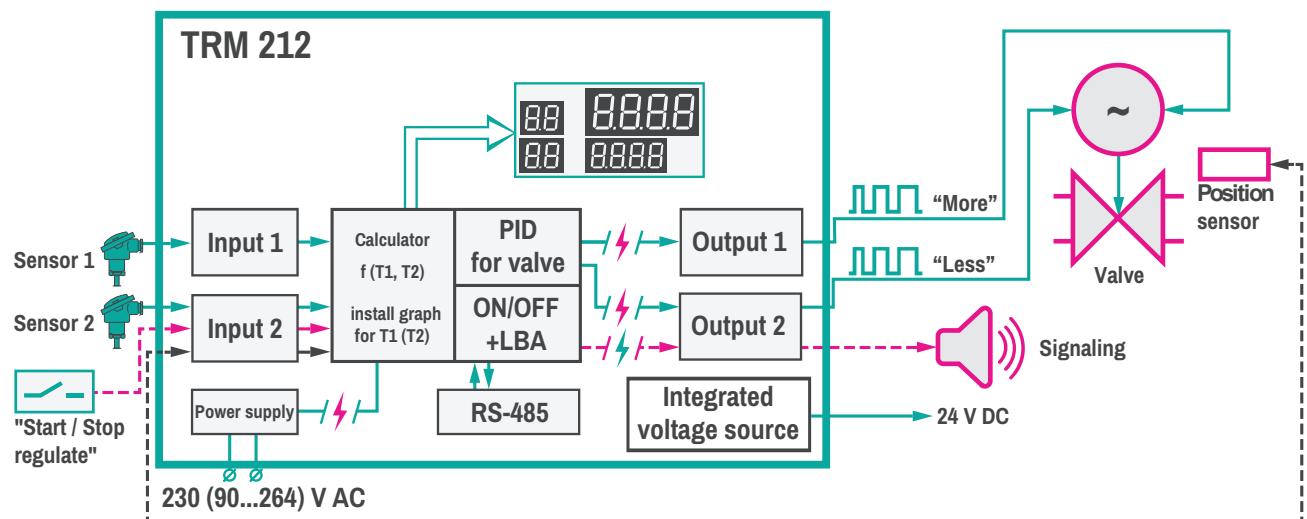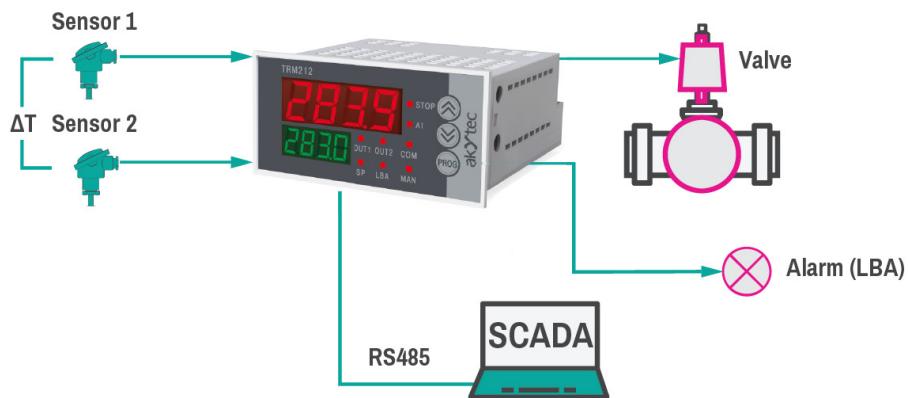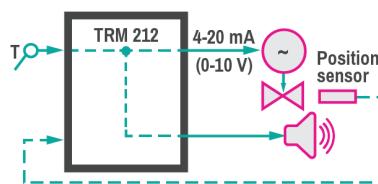



Temperature control of a three-step control valve with a position sensor

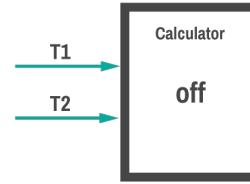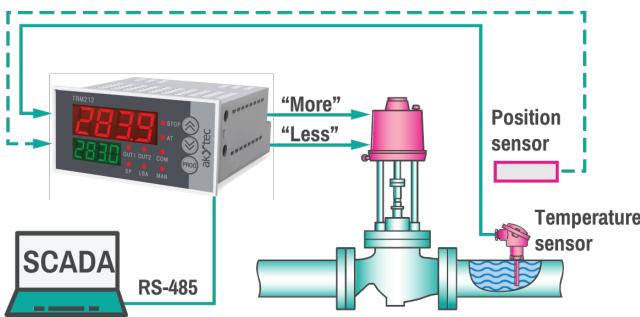



Temperature control using a three-step control valve with / without a position sensor.

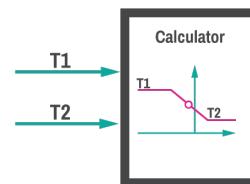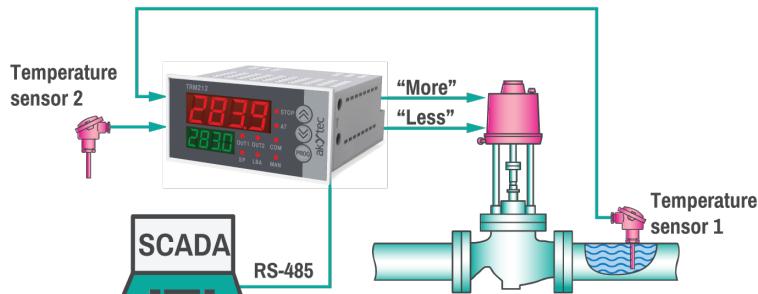



Weather-compensated control: temperature regulation in a heating system depending on the outdoor temperature.

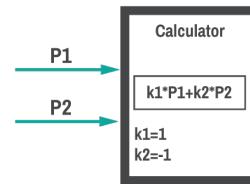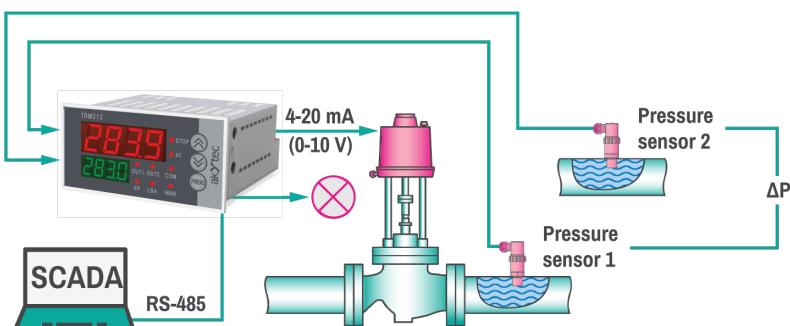

Pressure difference regulation in pipes using a three-step control valve without any position sensor.

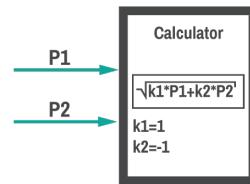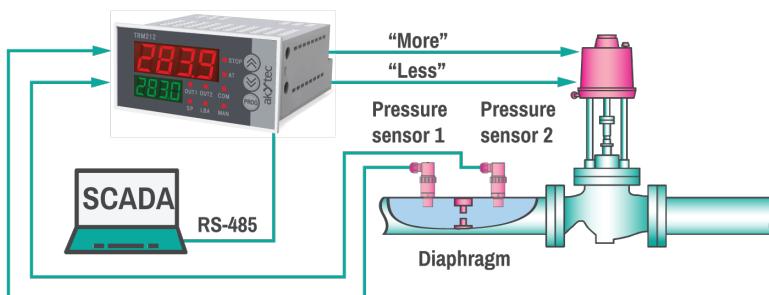

Pressure-based flow measurement and regulation in standard orifice plates or Venturi tubes without using differential manometers.

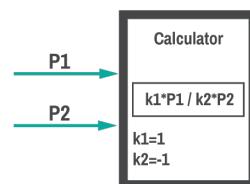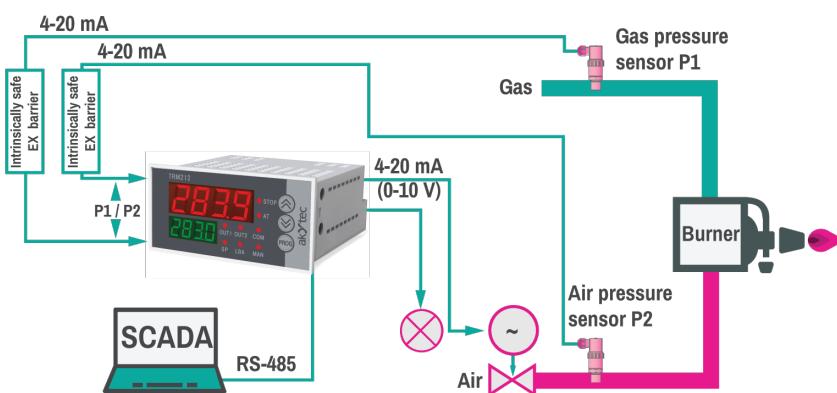

Regulation of gas/air ratio using valves with an analog input. The second output may be used for alarm.

Temperature Controller

The 1-channel temperature controller TRM500 is a universally applied and easily operated stand-alone device. This controller features one configurable analog input for a wide range of resistance thermometers and thermocouples as well as one digital input. A relay output, an alarm output and a DC logic output are also available.

Functions and features:

- On-Off or PID control
- Manual control
- 20 mm, 4 digit display, 2nd display optional
- Digital input filter with an adjustable time constant
- Custom 2-point linearization
- Digital input (remote start/stop or setpoint change)
- Temperature range alarm
- Auxiliary alarm output
- Additional logic output (SSR)
- Configurable outputs
- Autotuning function
- Cold junction compensation
- Input calibration
- 9 status LEDs
- Digital input filter with an adjustable time constant:
 - Custom linearization
 - Limit value monitoring
 - 9 status LEDs Configuration via the functional keys

Inputs:

- Universal input for resistance thermometers and thermocouples:
 - Resistance thermometers: Pt50, Pt100, Pt500, Pt1000, Ni100, Ni500, Ni1000
 - Resistance thermometers in 2-,3- or 4-wire circuit
 - Thermocouples: B, J, K, L (GOST), N, R, S, T
 - Cold junction compensation
- Digital input: potential free-contact



1 channel for controlling



1 universal analog input



Thermocouple

Resistance temperature detector



Powerful relay output 30 A



On-off control



PID controll



Cost effective




Ambient temperature

Areas of application

The TRM500 can be applied in furnaces, injection moulding machines, extruders, PET bottle manufacturing, shrink wrappers, dryers, etc.

Technical data:

Power supply	230 (96...264) V AC; 50 (47...63) Hz
Power consumption, max.	5 VA
Resistance thermometer	Pt50, Pt100, Pt500, Pt1000, Ni100, Ni500, Ni1000
Accuracy	0.25 %
Connection circuit	2-, 3-, 4-wire
Sampling rate for 3-wire	0.3 s
Sampling rate for 2-, 4-wire	0.2 s
Lead resistance, max.	15 ohm
Reference junction	internal
Thermocouple	B, J, K, L (GOST), N, R, S, T
Accuracy	0.50%
Sampling rate, max.	0.2 s
Lead resistance, max.	100 ohm
Digital input	potential free contact
ON, resistance, max.	70 ohm
OFF, resistance, min.	1000 ohm
Digital outputs	
OUT1 (Relay)	30A / 250 V AC (resistive), 20A / 30 V DC
OUT2 (Relay)	5A / 250 V AC (resistive), 3A / 30 V DC
OUT3 (Solid State Relay)	0 / 5 V, 40 mA
Dimensions	96 x 48 x 100 mm
IP Code	front IP54, enclosure IP20
Ambient temperature	-20...+50 °C
Humidity	up to 80% (non-condensing)
Weight	approx. 160 g

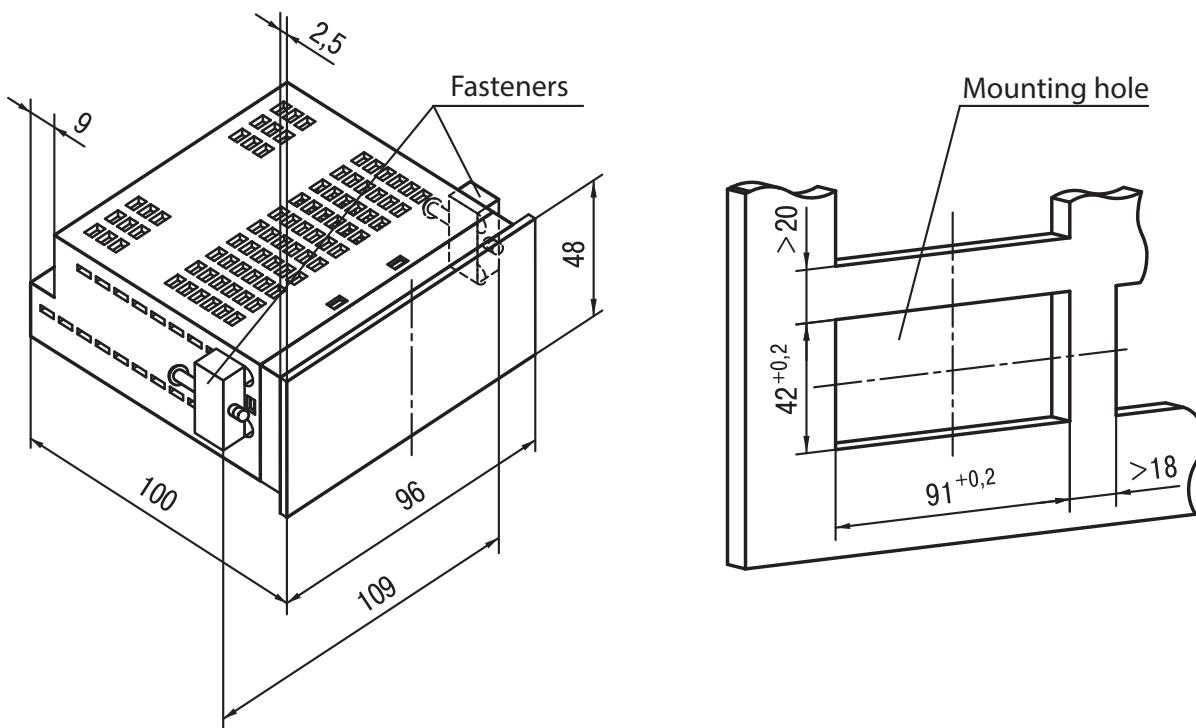Dimensions

Head-Mount Temperature Transmitter

The NPT3 transmitter is designed to be mounted on a measuring insert in a DIN connection head of Form B. The device converts the sensor signal of a TC or RTD to a 4-20 mA standard signal. The configuration is performed via the USB interface. No programming adapter is required. The configuration software is in delivery included.

Functions and features:

- Suitable for a wide variety of RTDs and TCs
- Support for 2-, 3-, or 4-wire RTD connection
- Operating temperature -40...85°C
- High accuracy and resolution
- High reliability
- Configuring over the USB interface
- Free configuration software included

Areas of application

- Any DIN Form B sensor head.

Technical data:

Power supply	24 (12...36) V DC
Analog input	1
Analog output	1
RTD	Pt50, Pt100, Pt500, Pt1000, Ni100
TC	B, J, K, N, R, S, T
Accuracy	
TC	0.5 %
RTD	0.25 %
Linearity error, max.	0.2 %
Analog output	4-20 mA
Permissible load	$R_L \leq (U_{\text{V}} - 11 \text{ V}) / 0.02 \text{ A}$
Ambient temperature	-40...+85 °C
IP code	IP30
Dimensions	Ø 44 x 18 mm
Weight	approx. 25 g



1 universal analog input

1AI

Thermocouple

Resistance temperature detector

Analog output 4-20 mA

4-20 mA
output

USB interface



DIN Form B sensor head installation



Ambient temperature

+85 °C
-40 °C


Compact Temperature Transmitter

The NPT4 is a universal temperature transmitter housed in a 6-mm slim enclosure for DIN rail mounting. This device is intended to convert any input signal from a TC or RTD (2-, 3-, 4-wire) sensor into a 0(4)-20 mA or 0(2)-10 V standard signal. The input is protected against sensor break and short circuit. The power supply circuit is protected against reverse polarity. A wide variety of RTD and TC sensors are accepted. The device configuring is performed via the USB interface.

Functions and features:

- Support for a wide variety of RTD and TC
- 2-, 3- or 4-wire connection
- Analog output 0-5 mA, 0(4)-20 mA, 0(2)-10 V
- Operating temperature -40...70 °C
- High reliability
- High accuracy and resolution
- Configuring over the built-in USB port

Dimensions

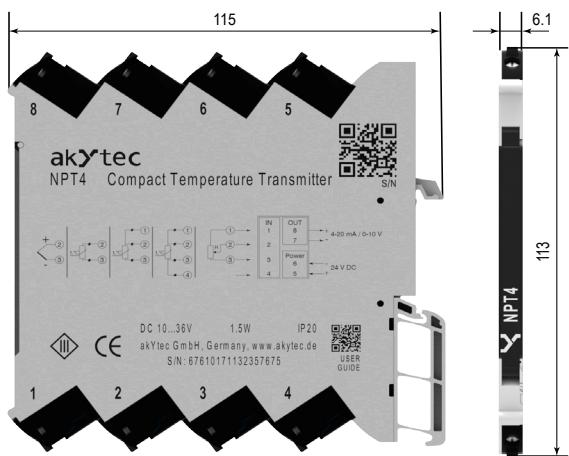

1 universal analog input

1AI

Thermocouple

Resistance temperature detector

1 universal analog output

1AO

Analog output 4-20 mA

Analog output 0-10 V

microUSB interface



DIN rail mount

Ambient temperature

General specification

Power supply	24 (10...36) V DC
Power consumption, max.	1.5 W
Galvanic isolation	1500 V
PC interface	microUSB (USB2.0 Full Speed)
Protection class	III
IP code	IP20
Ambient temperature	-40...+70 °C
Humidity	up to 95% (non-condensing)
Dimensions	6,1 x 113 x 115 mm
Weight	approx. 200 g

Input


Analog input	1
Accuracy	
TC	0.5%
RTD	0.25%
Resolution ADC	
TC	15 bit
RTD	15 bit
Galvanic isolation	1500 V

Output

Analog output	1
Galvanic isolation	1500 V
Measuring range	0...23 mA, 0...11 V
Input signal	0-5 mA, 0(4)-20 mA, 0-5 V, 0(2)-10 V
Input resistance	≤ 480 ohm
0-5 mA, 0(4)-20 mA	≥ 1000 ohm
0-5 V, 0(2)-10 V	
Resolution DAC	12 bit
Output ripple	0.12 mA

Sensor types:


Sensor	Measuring range, °C	Temperature coefficient, °C ⁻¹	Conversion range, min., °C	Sensor	Measuring range, °C	Conversion range, min., °C
RTD according to IEC 60751:2008						
Pt50	-200...+850	0.00385	100	J	-200...+1200	400
Pt100	-200...+850		100	N	-200...+1300	500
RTD according to GOST 6651						
50P	-200...+850	0.00391	100	K	-200...+1300	500
50M	-180...+200	0.00428	50	S	0...+1750	600
Cu50	-50...+200	0.00426	50	R	0...+1750	600
100P	-200...+850	0.00391	100	B	+200...+1800	1200
100M	-180...+200	0.00428	50	A	0...+2500	600
Cu100	-50...+200	0.00426	50	T	-200...+400	600
Ni100	-60...+180	0.00617	50	TC according to DIN 43710		
Position encoders						
Potentiometer (3-wire)	0...100 %	-	10 %	L	-200...+900	400
Resistance sensor (2-wire)	0...1000 Ohm	-	100 Ohm	TC according to GOST 8.585		
				L	-200...+800	400
				A-2	0...+1800	600
				A-3	0...+1800	600

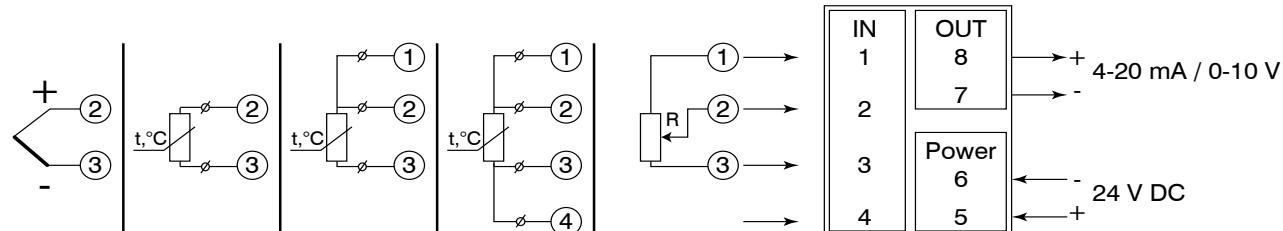Electrical connections:


Temperature Sensor Pt100/Pt1000

The DTS125L is a temperature sensor for measuring air temperature in outdoor or indoor environments. The wallmount IP65-rated enclosure enables this sensor to be utilized in warehouses manufacturing facilities with high installation demands to dust and water protection.

Dimensions

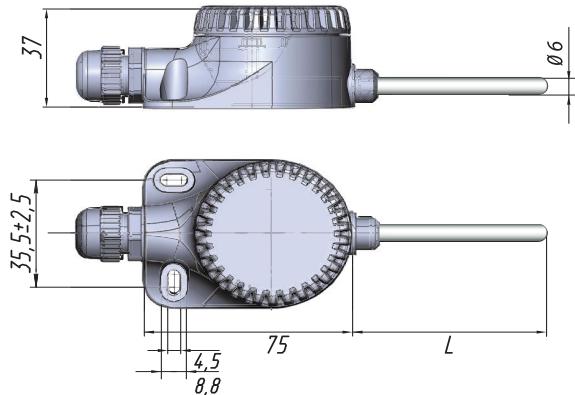

Electrical connection

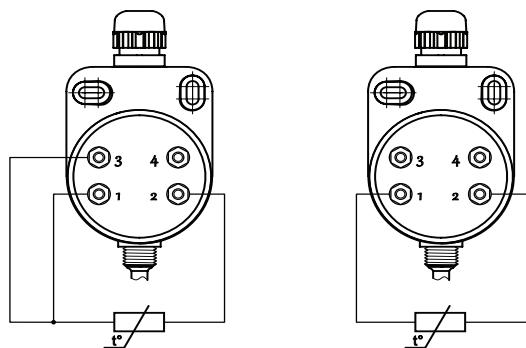

Technical data:

Sensor type	Pt100, Pt1000
Wiring	2-wire, 3-wire
Measuring range	-50...+100 °C
Accuracy class	B
Response time, max.	10 s
Insulation resistance, min.	20 Mohm
IP code	IP65
Protective tube	AISI 321
Probe length	60 mm




PT100/PT1000 sensor type



Ambient temperature



Wall mount



IP code



For HVAC systems



Ordering code

DTS125L -	X.	X.	X
Sensor type			
Pt100	PT100		
Pt1000	PT1000		
Wiring			
2-wire		2W	
3-wire*		3W	
Probe length			60
60 mm			

* for Pt100 only

Pressure Transmitter for general application

The PD111 is a pressure transmitter designed to convert vacuum or gauge pressure in an electrical signal of 4-20 mA. This transmitter is made of stainless steel AISI316L, equipped with a silicon measuring cell, and a laser-welded membrane that requires no sealing. The internal electronics are well-isolated with a potting compound, which provides additional protection against internal condensation allowing the PD111 to be installed in environments with extreme humidity levels (up to 90%).


Functions and features:

- Wide variety of measuring ranges
- Laser-welded diaphragm (no sealing required)
- Silicon sensor
- Low temperature influence ($\leq 0.1\% / 10^\circ\text{C}$)
- Long-term stability (<0.2% / year)
- Compact design
- Overload limit: 200 % FS

Areas of application

- Pneumatics
- Hydraulics
- Machinery and plant engineering
- Energy
- Building technology
- Chemistry and petrochemistry
- Environmental industry


Dimensions

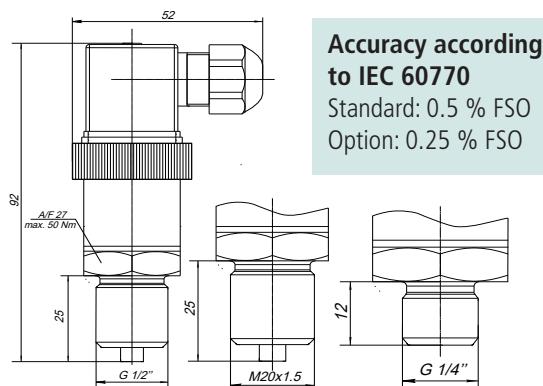

Output signal 4-20 mA



Laser-welded diaphragm



Protection against internal condensation



Additional polynomial digital temperature compensation



Cost effective



IP code



Ambient temperature




For general industrial applications



Technical data:

Measuring ranges											
Nominal pressure, bar	0...-1	0...-0.6	0...-0.4	0...-0.25	0...-0.16	0.16	0.25	0.4	0.6	1	1.6
Overpressure, bar	-1	-1	-1	-0.7	-0.7	0.7	0.7	2	2	2	10
Burst pressure, bar	-	-	-	-	-	1.4	1.4	4	4	4	20
Nominal pressure, bar	2.5	4	6	10	16	25	40	60	100		
Overpressure, bar	10	10	20	20	60	60	200	200	200		
Burst pressure, bar	20	20	40	40	120	120	400	400	400		
Vacuum resistance	$P_N \geq 1$ bar: unlimited vacuum resistance $P_N < 1$ bar: on request										
Supply / Output signal											
Power supply	12...36 V DC										
Output signal	4...20 mA										
Performance											
Accuracy	standard: $\pm 0.5\%$ FSO option: $\pm 0.25\%$ FSO (except the following ranges, bar: -0.16..0; 0..0.16; 0..60; 0..100)										
Permissible load	0...1200 ohm										
Influence effects	supply: 0.01 % FSO / 10 V; load: 0.05 % FSO / kohm										
Temperature stability	$\leq 0.1\%$ FSO / 10 °C										
Response time	≤ 100 ms										
Permissible temperatures											
Permissible temperatures	medium: -40...100 °C environment: -40...80 °C storage: -40...80 °C										
Electrical protection											
Short-circuit protection	yes										
Reverse polarity protection	yes										
Electromagnetic compatibility	emission and immunity according to EN 61326										
Mechanical stability											
Vibration	9 g RMS (25...2000 Hz) according to DIN EN 60068-2-6										
Shock	480 g / 1 ms according to DIN EN 60068-2-27										
Materials											
Pressure connection	stainless steel 304 L										
Enclosure	stainless steel 304 L										
Diaphragm	stainless steel 316 L										
Media wetted parts	pressure connection, diaphragm										
Miscellaneous											
Current consumption	max. 70 mA										
Weight	approx. 400 g										
Installation position	any										
Operational life	> 500 000 hours										
CE-conformity	EMC Directive: 2004/108/EC										
Wiring diagram											

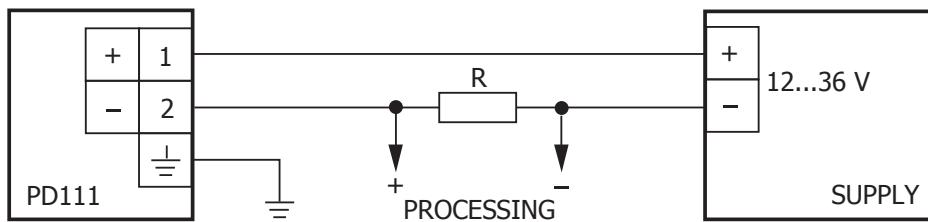

Pin configuration

Supply +	1
Supply -	2
Shield	ground pin

Ordering code

PD111

X	X	X	X	X	X
---	---	---	---	---	---

Input	[bar]							
0...-1	V	1	P	0	B			
0...-0.6	V	6	0	0	M			
0...-0.4	V	4	0	0	M			
0...-0.25	V	2	5	0	M			
0...-0.16	V	1	6	0	M			
0...0.16	G	1	6	0	M			
0...0.25	G	2	5	0	M			
0...0.4	G	4	0	0	M			
0...0.6	G	6	0	0	M			
0...1	G	1	P	0	B			
0...1.6	G	1	P	6	B			
0...2.5	G	2	P	5	B			
0...4	G	4	P	0	B			
0...6	G	6	P	0	B			
0...10	G	0	1	0	B			
0...16	G	0	1	6	B			
0...25	G	0	2	5	B			
0...40	G	0	4	0	B			
0...60	G	0	6	0	B			
0...100	G	1	0	0	B			
-0.125...0.125	C	1	2	5	M			
-0.2...0.2	C	2	0	0	M			
-0.3...0.3	C	3	0	0	M			
-0.5...0.5	C	5	0	0	M			
-0.8...0.8	C	8	0	0	M			
-1...1	C	1	P	0	B			
-1...3	C	3	P	0	B			
-1...5	C	5	P	0	B			
-1...9	C	9	P	0	B			
-1...15	C	0	1	5	B			
-1...24	C	0	2	4	B			
Accuracy								
0.5 %					5			
0.25%					2			
Pressure connection								
G 1/2"						7		
G 1/4"						8		
M20x1.5						1		

V – vacuum, G – gauge, C – combined

Pressure Transmitter for viscous and pasty media

The PD121 Pressure Transmitter features a flush diaphragm made of stainless steel AISI 316L and a silicon measuring cell; it converts pressure into an electrical signal of 4-20 mA. The flush diaphragm enables easy cleaning, which is essential for the use of sensors in the food and beverage industries. Depending on the device variant, we offer transmitters for gauge or vacuum pressure, as well as universal devices capable of measuring both negative and positive pressure. The PD121 transmitters are applied for pressure measurement in liquid, viscous, pasty, adhesive, crystallizing, and polluted media compatible with stainless steel AISI 316L / 1.4435 (AISI 304L / 1.4307).


Functions and features:

- Flush diaphragm
- Wide variety of measuring ranges
- Laser-welded diaphragm (no sealing)
- Silicon sensor
- Low temperature influence: $\leq 0.1\% / 10^\circ\text{C}$
- Good long term stability: $< 0.2\% / \text{year}$
- Compact design
- Overload limit: 200 % FS
- Easy to clean
- Level measurement

Areas of application

- Suitable for hygienic application
- General industrial applications
- Food and beverage industry
- Environmental industry
- Paints and varnishes

Dimensions

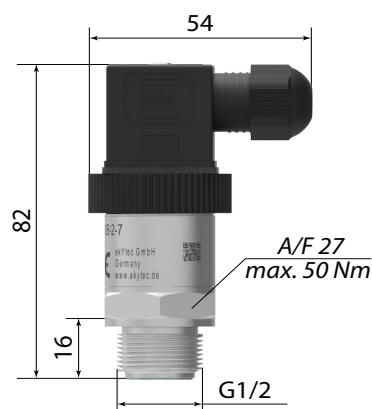

Accuracy according to IEC 60770
Standard: $\pm 0.5\% \text{ FSO}$



**4-20
mA**



Output signal 4-20 mA

Flush diaphragm



Level measurement in open containers



Protection against internal condensation



Additional polynomial digital
temperature compensation



Cost effective



IP65



Ambient temperature



For viscous and particle-laden media

Technical Data:

Measuring ranges												
Nominal pressure, bar	0.16	0.25	0.4	0.6	1	10						
Overpressure, bar	0.7	0.7	2	2	2	20						
Burst pressure, bar	1.4	1.4	4	4	4	40						
Vacuum resistance	$P_N \geq 1 \text{ bar}$: unlimited vacuum resistance $P_N < 1 \text{ bar}$: on request											
Supply / Output signal												
Power supply	12...36 V DC											
Output signal	4...20 mA											
Performance												
Accuracy	standard: $\pm 0.25\% \text{ FSO}$ $\pm 0.5\% \text{ FSO}$ (0...0.16 bar, 0...0.25 bar)											
Permissible load	0...1000 ohm											
Influence effects	supply: 0.01 % FSO / 10 V; load: 0.05 % FSO / kohm											
Temperature stability	$\leq \pm 0.1\% \text{ FSO} / 10^\circ\text{C}$											
Response time	$\leq 100 \text{ ms}$											
Permissible temperatures												
Permissible temperatures	medium: -40...100 °C environment: -40...80 °C storage: -40...80 °C											
Electrical protection												
Short-circuit protection	yes											
Reverse polarity protection	yes											
Electromagnetic compatibility	emission and immunity according to EN 61326											
Mechanical stability												
Vibration	9 g RMS (25...2000 Hz) according to DIN EN 60068-2-6											
Shock	480 g / 1 ms according to DIN EN 60068-2-27											
Materials												
Pressure connection	stainless steel 304 L											
Enclosure	stainless steel 304 L											
Diaphragm	stainless steel 316 L											
Media wetted parts	pressure connection, diaphragm											
Miscellaneous												
Current consumption	max. 70 mA											
Weight	approx. 400 g											
Installation position	any											
Operational life	> 500 000 hours											
CE-conformity	EMC Directive: 2004/108/EC											
Wiring diagram												
Pin configuration												
Supply +	1											
Supply -	2											
Shield	ground pin											

Ordering code

PD121	X	-	X	X	X	X	-	X	-	X
Input [bar]										
0...0.16*	G		1	6	0	M				
0...0.25*	G		2	5	0	M				
0...0.4	G		4	0	0	M				
0...0.6	G		6	0	0	M				
0...1	G		1	P	0	B				
0...10	G		0	1	0	B				
Accuracy										
0.25%						2				
Pressure connection										
G 1/2"							7			

V – vacuum, G – gauge, C – combined

* Available only with accuracy 0.5%

Humidity and Temperature Transmitter

The humidity and temperature transmitter PVT10 designed for indoor installation is intended to measure relative humidity, temperature, or dew point while ensuring high accuracy and stability. Compact wall-mount plastic enclosure with pass-through openings provides natural ventilation of the internal electronics.

The PVT10 features two independent configurable analog outputs (4-20mA or 0-10V) and an RS485 interface for Modbus communication.

Functions and features:

- Excellent repeatability and stability
- Fully calibrated and temperature compensated
- Compact wall-mount enclosure with natural ventilation
- Two independent configurable analog outputs 0-10 V / 4-20 mA
- RS485 Modbus RTU interface for Fieldbus networking

Areas of application

The transmitter PVT10 is applicable at home and office, HVAC and building automation systems, e.g. in hotels, museums or data center.

Technical Data:

Sensors	combined RH and T sensors
Measurement ranges	0...95 % RH / -20...+70 °C
Resolution	0.1 % RH / 0.1 °C
Accuracy	
RH = 20...80%	±3%
RH = 5...20% or 80...95%	±4%
T = 20...+70 °C	±0.5 °C
Response time	approx. 15 s
Self-diagnostics	full functionality check at start-up
Warm-up time, max	1 s
Power supply	12 / 24 (11.5...30) V DC
Power consumption, max.	1.5 W
Interface / Protocol	RS485 / Modbus RTU
Analog outputs	2x 4-20 mA / 0-10 V, configurable
Enclosure	white ABS, wall mount, IP20
Cable connections	screwless terminal blocks
Dimensions	71 x 71 x 27 mm
Operating environment	residential, business and industrial indoor spaces



2 transmitters in 1

2 in 1

Humidity transmitter



Temperature transmitter



4-20 mA output signal

4-20 mA

0-10 V output signal

0-10 V

Modbus protocol

Modbus

RS485 interface

RS485

IP code

IP20

Humidity and Temperature Transmitter

The humidity and temperature transmitter PVT100 is intended to measure relative humidity, temperature, or dew point while ensuring high accuracy and stability. The dust-tight and water-resistant IP65-rated enclosure is available in duct-mount version as well as with a remote probe. The PVT100 features two independent configurable analog outputs (4-20mA or 0-10V) and an RS485 interface for Modbus communication.

Functions and features:

- Dustproof and waterproof enclosure for harsh environment
- Three types of enclosure
- Wide measurement ranges, high accuracy and long-term stability
- Remote temperature probe with fluoroplastic cable for temperatures of up to +120 °C
- Two independent user-configurable analog outputs 0-10 V / 4-20 mA
- RS485 Modbus RTU interface for Fieldbus networking

Areas of application

- HVAC / building automation
- Energy management systems (EMS)
- Indoor Air Quality (IAQ)
- Hospitals / labs / clean rooms
- Museums / archives, supermarkets
- Swimming pools
- Refrigeration systems
- Paint spray booths
- Pharmaceutical
- Food processing
- Food storage
- Greenhouses, mushroom plants
- Animal rooms
- Textile production
- Paper production
- Drying (ceramic, timber, etc)



2 transmitters in 1

2 in 1

Humidity transmitter



Temperature transmitter



4-20 mA output signal

4-20 mA

0-10 V output signal

0-10 V

Modbus protocol

Modbus

RS485 interface

RS485

IP code

IP65

Technical Data:

Sensors	combined RH and T sensors
Measurement ranges	0...100% RH / -40...+80(120) °C
Resolution	0.1 % RH / 0.1 °C
Accuracy	±2.5(3.5)% RH / ±0.5(0.7)°C
Response time	approx. 15 s
Self-diagnostics	full functionality check at start-up
Warm-up time	≤ 1 s
Power supply	12 / 24 (11...30) V DC
Power consumption, max.	1.5 W
Interface / Protocol	RS485 / Modbus RTU
Analog outputs	2x 4-20 mA / 0-10 V, configurable
Cable connections	screwless terminal blocks
Probe connector	M12, IP68
Enclosure	grey ABS, wall mount, IP65
Dimensions	80 × 82 × 55 mm
Operating environment	industrial indoor and outdoor places

**PVT100-RP**

Humidity & Temperature Transmitter with
remote probe and 2.5 m or 5 m cable


Data logger

MSD200 is a DIN rail device capable of logging data over up to 64 channels and storing them on an SD card (max. 32 GB). This logger has four (0)4-20 mA analog inputs and two RS485 interfaces (Modbus RTU/ASCII). The MSD200 is configured over the built-in USB port with a free-of-charge software tool (included).

Functions and features:

- 4 analog inputs for standard electrical signals 0-5 mA, 0-20 mA or 4-20 mA
- Scaling function to convert the measured value to any unit
- Monitoring of data received from other devices via Modbus over RS485 interface
- Logging the received data and store it as a hard-copy to a memory card as a CSV file
- Modbus RTU/ASCII communication in master or slave mode over the RS485 interface
- User-friendly software tool MSD200 Configurator

Dimensions

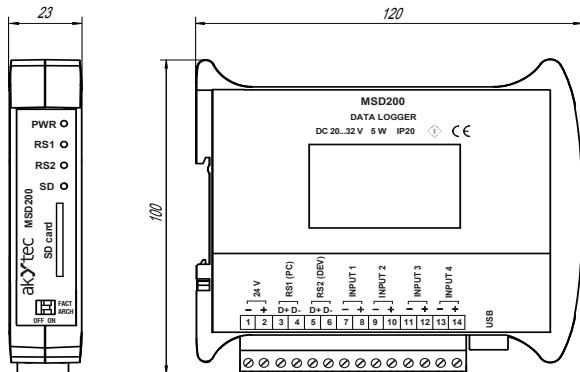

64 data measuring points

**64
channels**

SD card (up to 32 GB)

SD

4 analog inputs

4AI

4-20 mA input signal

**4-20
mA**

Modbus protocol

Modbus

RS485 interface

RS485

Master or Slave in a Modbus network

**MASTER
SLAVE**

USB interface

USB

DIN rail mounting

DIN

Ambient temperature


**+55°C
-10°C**

Areas of application


The MSD200 can be used for data archiving in various processes in the food, chemical, gas and packaging industry as well as in the construction materials and wood processing industries. It can be also applied in many other areas of industrial and building automation.

Technical Data:

General	
Power supply	24 (20...32) V DC
Power consumption, max.	5 W
Number of channels, max.	64
Logging cycle	1...65535 s
Dataset size (per 1 channel)	20 byte
Storage media	MMC, SD, SDHC, microSD
Storage capacity	≤32 GB
Storage medium file system	FAT32
Analog inputs	
Quantity	4
Input signals	0-5 mA, 0(4)-20 mA
Sampling rate for analog inputs, max.	100 ms
Accuracy	±1.0%
Input resistance	133 ohm
Galvanic isolation	none
Resolution ADC	12 bit
Communication	
Interfaces	2 x RS485 (RS1, RS2), USB-Device 2.0
Protocol	
RS485	
RS1 operation mode	Slave (PC interface)
RS2 operation mode	Master (Device interface)
RS1 protocol	Modbus RTU
RS2 protocol	Modbus RTU / ASCII, akYtec
Baud rate	1.2...115.2 kbit/s
Galvanic isolation	individual
Environment	
Ambient temperature	-10...+55 °C
Humidity	up to 80%, non-condensing
IP Code	IP20
Enclosure	
Dimensions	22.5 x 102 x 120 mm
Weight	approx. 150 g
Material	plastic

Process Displays		ITP11 / ITP11-G	pages 04–05
		ITP11-R-W / ITP11-G-W	pages 06–07
		ITP14 / ITP14-G	pages 08–09
		ITP15	pages 10–11
		ITP16 / ITP16-G	pages 12–13
		SMI2 / SMI2 - G	pages 14–15
Mini-PLCs		PR100 MINI-PLC 20 I/O	pages 16–17
		PR102 MINI-PLC 40 I/O	pages 18–19
		PR200	pages 20–22
		PRM	pages 23–24
		SMI200	pages 25–26
I/O-Modules		akYtec ALP	page 27
		Overview MX110	pages 28–29
		MV110-24.8A / MV110-24.8AS	page 30
		MV110-24.16D(DN) / MK110-24.8D.4R	page 31
		MU110-24.8I / MU110-24.6U	page 32
		MU110-24.8R / MU110-24.8K / MU110-24.16R / MU110-24.16K	page 33

		MX210 Series	pages 34-35
		MV210-101, MV210-202, MV210-204, MV210-212	page 36
		MV210-214, MV210-221, MK210-311, MK210-312	page 37
		MU210-401, MU210-402, MU210-410, MU210-501	page 38
Interface converters		IC3, IC4, IC5	pages 39-44
Process Controllers		TRM138	pages 45-47
		TRM202	pages 48-50
		TRM210	pages 51-53
		TRM212	pages 54-57
		TRM500	pages 58-59
Temperature Transmitters		NPT3	page 60
		NPT4	pages 61-62
		DTS125I	page 63
Pressure Transmitters		PD111	page 64-66
		PD121	pages 67-69
Humidity Transmitters		PVT10, PVT100	pages 70-72
Data Loggers		MSD200	pages 73-74

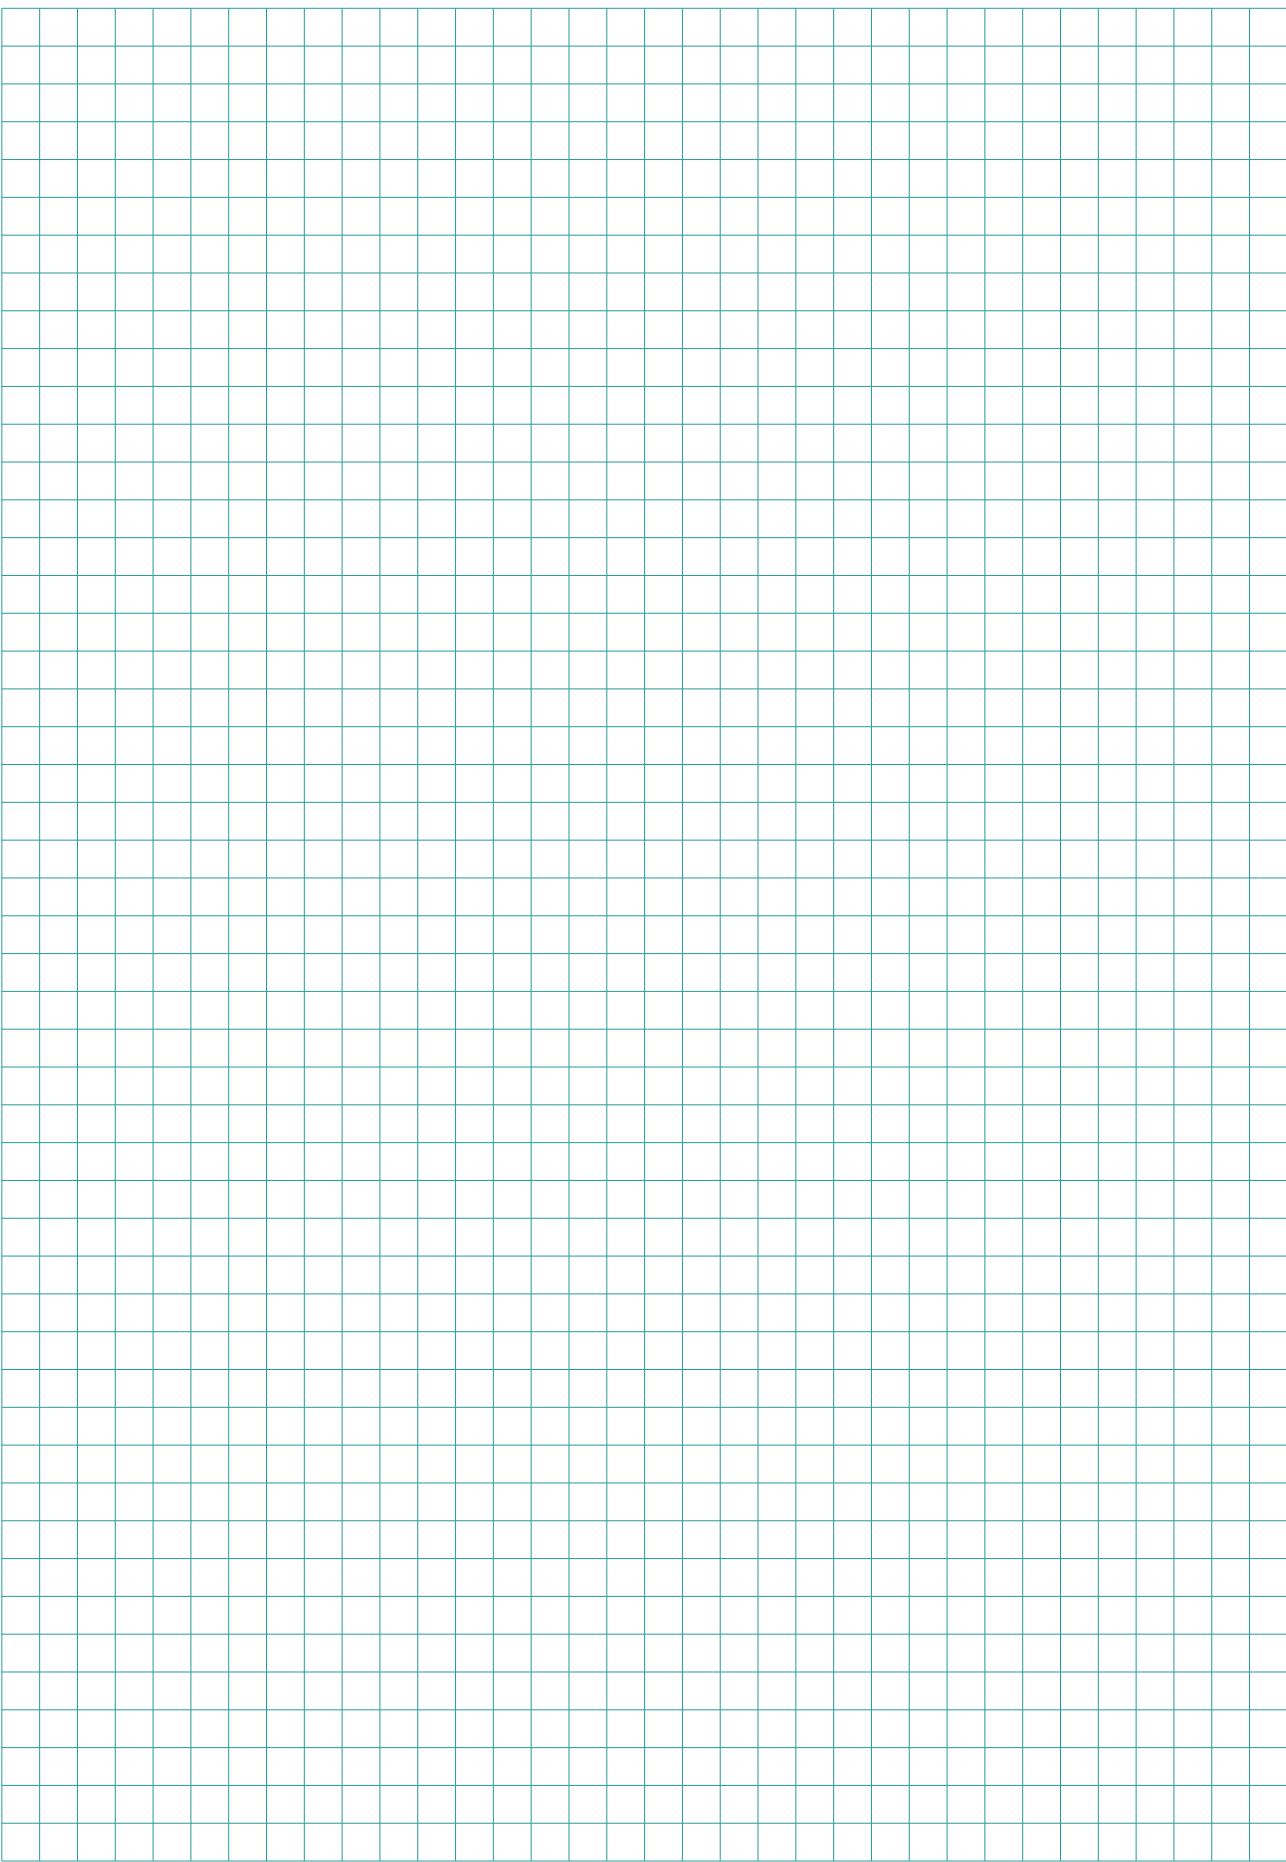

NOTICE

akYtec

We will be glad to assist you! Tel.: +49 (0) 511 16 59 672-0



akYtec GmbH from Hanover, Germany develops and distributes innovative automation technology and industrial electronic products. These include various digital displays, control panels, programmable relays, and many other devices.

akYtec GmbH

Vahrenwalder Str. 269 A
30179 Hannover, Deutschland

Tel: +49 (0) 511 / 16 59 672-0
Fax: +49 (0) 511 / 16 59 672-9

info@akytec.de